



Grade Name for Coated Carbide

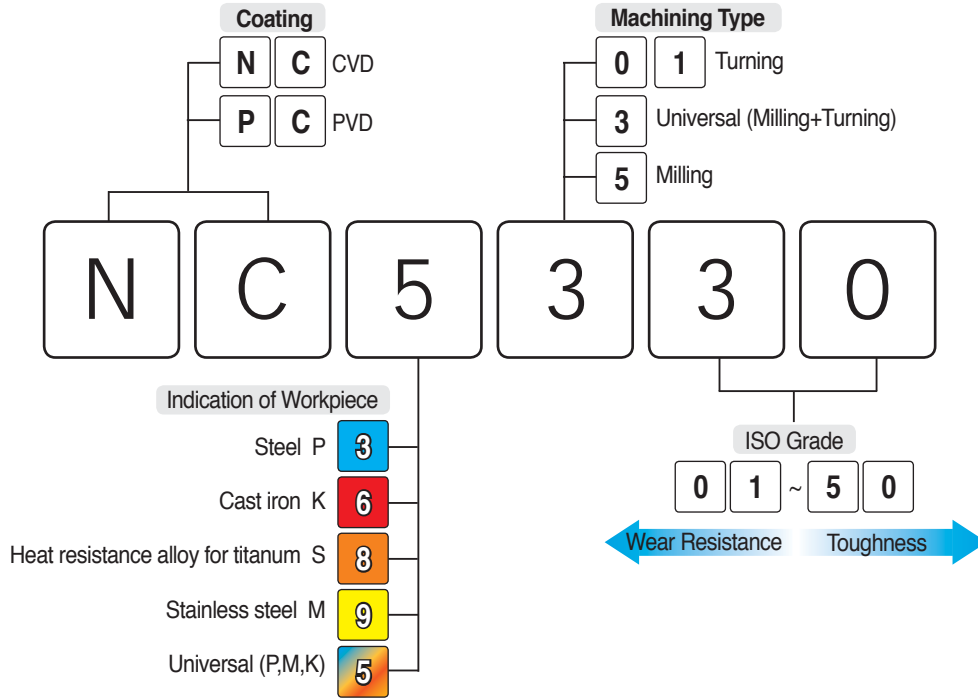

Chip Breaker

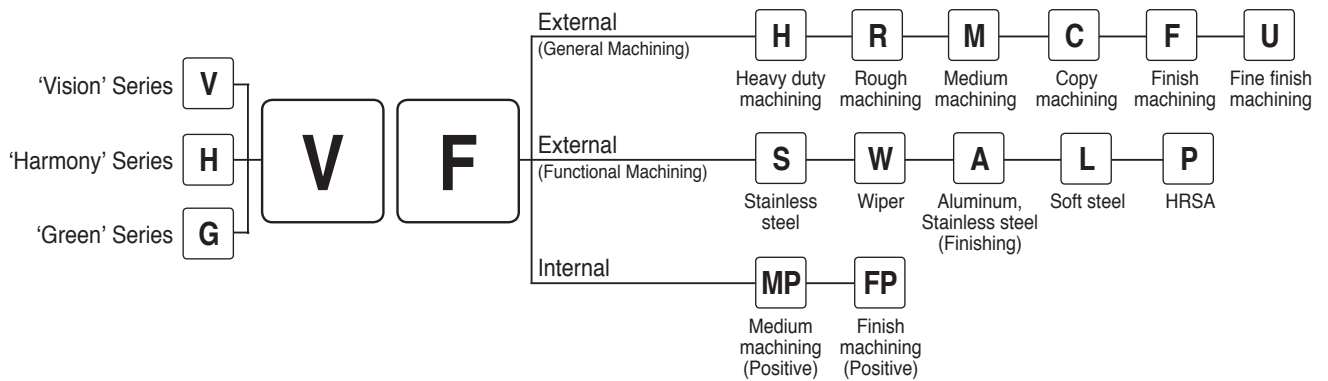

Terminology of tool formula

TERM	CODE	UNIT
Tool diameter	D	mm
Cutting speed	vc	m/min
Revolution per minute	n	min ⁻¹
Feed per minute	vf	mm/min
Feed per revolution	fn	mm/rev
Feed per tooth	fz	mm/t
Tooth	z	
Axial depth of cut	ap	mm
Radial depth of cut	ae	mm
Peak feed	pf	mm

TERM	CODE	UNIT
Horse power requirement	Pc	kW
Specific cutting resistance	kc	MPa
Torque	Mc	N.m
Thrust	Tc	N
Cycle time	tc	min
Tool life	T	min
Flank wear	V _B	mm
Crater wear	Kt	mm
Nose radius	r	mm


How to use Tool4U (Web quotation requirement)

1 Contact with Korloy Homepage

<http://www.korloy.com> (Korloy homepage)

2 Click banner-icon on the web site

3 Main page

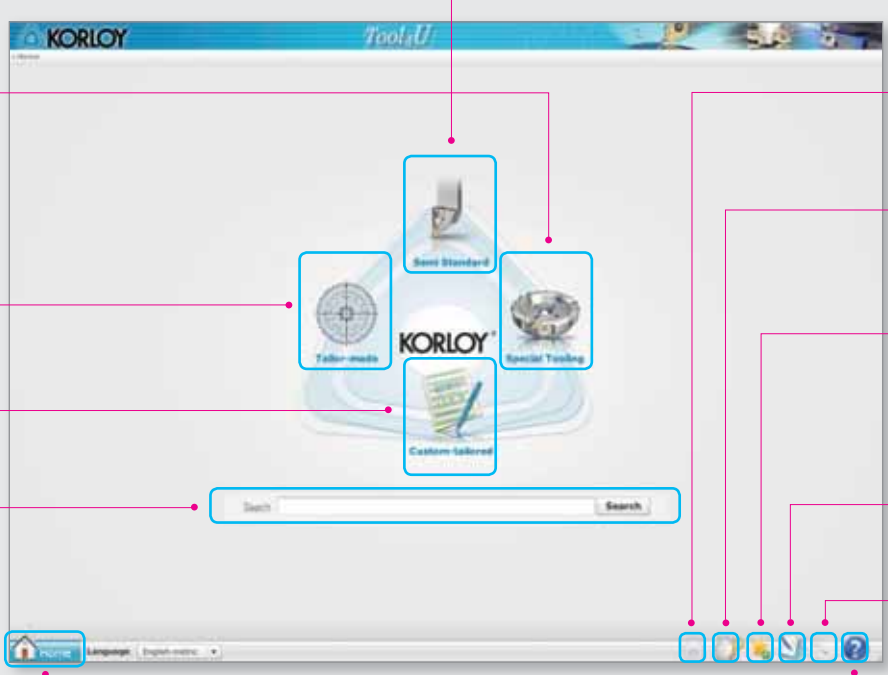

1 Semi standard
Standard but different in size

2 Tailor-made
Standard no korloy item

3 Special Tooling
For special tolling such as gear, edge miller, railway, non-standard indexable & facemill

4 Custom-tailored
Customized item by special request

5 Search
You can search by designation

6 Home
Click here to go on to the mail page

7 Administrator
Only administrators may access this menu

8 Login/Logout
Login, Logout & Register as a member here

9 My favorite
You can organize shortcuts on your favorite items (registered member only)

10 Memo
You can save short text here

11 My quotation
You can check your quotation list here

12 Help
Functional description of each menu

4 Screen shot

• Screen shot 1 : step3. Product detail



1. **Step** : Select category, product and check product detail
2. **Next step** : Open new window for changing dimension
3. **Print** : Print current page
4. **Search** : Search product by designation

• Screen shot 2 : Size input page



Enter essential information needed to quote and click "Quote" button to send e-mail

A

GRADES & CHIP BREAKERS

Korloys new grades are designed with optimal substrates for each application and are PVD coated for high temperature, high hardness and oxidation resistance, or CVD coated for high temperature and wear resistance. Additionally, the improved post-coating treatment provides superior surface finishes to ensure the highest levels of quality and productivity.

C O N T E N T S

CHIP

Grades

A02 Grades system

Turning Grades

A03 Turning grade selections

A04 CVD coated grades

A08 PVD coated grades

A11 Uncoated grades

A12 Cermet grades

A13 Coated Cermet grades

Milling Grades

A15 Milling grade selections

A16 CVD coated grades

A18 PVD coated grades

A21 Uncoated grades

A22 Milling Cermet grades



GRADES & BREAKERS

Solid Endmills & Solid Drills Grades

- A23** Solid Endmills grade selections
- A24** Ultra fine cemented carbides
- A25** Solid Drills grade selections

Others (turning/milling/endmills)


- A26** Diamond coated
DLC coated grades
- A27** cBN grades
- A30** PCD grades

Chip Breakers

- A31** Chip Breaker For Turning
- A33** Chip Breaker For Milling
- A34** Chip Breaker For Drilling

Grades system

Cutting Tool	Uncoated carbide	<table border="1"> <tr><td>P</td><td>Steel</td><td>ST05</td><td>ST10</td><td>ST15</td><td>ST20</td><td>ST30A</td><td>ST30N</td><td>ST30</td><td>ST40</td><td>ST45</td><td>ST46</td></tr> <tr><td>M</td><td>Stainless steel</td><td>U10</td><td>U20</td><td>ST30A</td><td>U40</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>K</td><td>Cast iron</td><td>H02</td><td>H01</td><td>H05</td><td>H10</td><td>G10</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>N</td><td>Non-ferrous metal</td><td>H01</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	P	Steel	ST05	ST10	ST15	ST20	ST30A	ST30N	ST30	ST40	ST45	ST46	M	Stainless steel	U10	U20	ST30A	U40							K	Cast iron	H02	H01	H05	H10	G10						N	Non-ferrous metal	H01									
	P	Steel	ST05	ST10	ST15	ST20	ST30A	ST30N	ST30	ST40	ST45	ST46																																						
	M	Stainless steel	U10	U20	ST30A	U40																																												
	K	Cast iron	H02	H01	H05	H10	G10																																											
	N	Non-ferrous metal	H01																																															
	Coated carbide for turning	<table border="1"> <tr><td>P</td><td>Steel</td><td>NC3010</td><td>NC3220</td><td>NC3120</td><td>NC3030</td><td>NC5330</td><td>NC500H</td><td></td><td></td><td></td><td></td></tr> <tr><td>M</td><td>Stainless steel</td><td>PC8110</td><td>NC9025</td><td>PC5300</td><td>PC9030</td><td>PC5400</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>K</td><td>Cast iron</td><td>NC6205</td><td>NC6210</td><td>NC315K</td><td>NC5330</td><td>PC5300</td><td>PC5400</td><td></td><td></td><td></td><td></td></tr> <tr><td>S</td><td>HRSA</td><td>PC8110</td><td>NC5330</td><td>PC5300</td><td>PC5400</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	P	Steel	NC3010	NC3220	NC3120	NC3030	NC5330	NC500H					M	Stainless steel	PC8110	NC9025	PC5300	PC9030	PC5400						K	Cast iron	NC6205	NC6210	NC315K	NC5330	PC5300	PC5400					S	HRSA	PC8110	NC5330	PC5300	PC5400						
	P	Steel	NC3010	NC3220	NC3120	NC3030	NC5330	NC500H																																										
	M	Stainless steel	PC8110	NC9025	PC5300	PC9030	PC5400																																											
	K	Cast iron	NC6205	NC6210	NC315K	NC5330	PC5300	PC5400																																										
	S	HRSA	PC8110	NC5330	PC5300	PC5400																																												
	Coated carbide for milling	<table border="1"> <tr><td>P</td><td>Steel</td><td>NC5330</td><td>NCM325</td><td>PC3600</td><td>PC5300</td><td>PC5400</td><td>NCM335</td><td>PC3545</td><td></td><td></td><td></td></tr> <tr><td>M</td><td>Stainless steel</td><td>NC5330</td><td>PC5300</td><td>PC9530</td><td>PC5400</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>K</td><td>Cast iron</td><td>PC8110</td><td>PC6510</td><td>PC5300</td><td>PC5400</td><td>NC5330</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>S</td><td>HRSA</td><td>PC5300</td><td>PC5400</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	P	Steel	NC5330	NCM325	PC3600	PC5300	PC5400	NCM335	PC3545				M	Stainless steel	NC5330	PC5300	PC9530	PC5400							K	Cast iron	PC8110	PC6510	PC5300	PC5400	NC5330						S	HRSA	PC5300	PC5400								
	P	Steel	NC5330	NCM325	PC3600	PC5300	PC5400	NCM335	PC3545																																									
	M	Stainless steel	NC5330	PC5300	PC9530	PC5400																																												
K	Cast iron	PC8110	PC6510	PC5300	PC5400	NC5330																																												
S	HRSA	PC5300	PC5400																																															
Coated carbide for Drills, Endmills	<table border="1"> <tr><td>Coated</td><td>General</td><td>PC203F</td><td>PC205F</td><td>PC210F</td><td>PC210A</td><td>PC215F</td><td>PC220</td><td>PC210</td><td>PC210C</td><td>PC221F</td><td>PC230F</td></tr> <tr><td>Uncoated</td><td>General</td><td>H01</td><td>FS1</td><td>FA1</td><td>FA2</td><td>FG2</td><td>FCC</td><td></td><td></td><td></td><td></td></tr> </table>	Coated	General	PC203F	PC205F	PC210F	PC210A	PC215F	PC220	PC210	PC210C	PC221F	PC230F	Uncoated	General	H01	FS1	FA1	FA2	FG2	FCC																													
Coated	General	PC203F	PC205F	PC210F	PC210A	PC215F	PC220	PC210	PC210C	PC221F	PC230F																																							
Uncoated	General	H01	FS1	FA1	FA2	FG2	FCC																																											
Turning Cermet	<table border="1"> <tr><td>P</td><td>Steel</td><td>CN1000</td><td>CN2000</td><td>CN20</td><td>CN30</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>K</td><td>Cast iron</td><td>CN1000</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	P	Steel	CN1000	CN2000	CN20	CN30							K	Cast iron	CN1000																																		
P	Steel	CN1000	CN2000	CN20	CN30																																													
K	Cast iron	CN1000																																																
Coated cermet	<table border="1"> <tr><td>P</td><td>Steel</td><td>CC105</td><td>CC115</td><td>CC125</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	P	Steel	CC105	CC115	CC125																																												
P	Steel	CC105	CC115	CC125																																														
Milling Cermet	<table border="1"> <tr><td>P</td><td>Steel</td><td>CN2000</td><td>CN20</td><td>CN30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	P	Steel	CN2000	CN20	CN30																																												
P	Steel	CN2000	CN20	CN30																																														
cBN	<table border="1"> <tr><td>P</td><td>Steel</td><td>KB320</td><td>KB330</td><td>KB350</td><td>KB360</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>K</td><td>Cast iron</td><td>KB410</td><td>KB350</td><td>KB370</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>S</td><td>HRSA</td><td>KB370</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>H</td><td>Hardened steel</td><td>KB410</td><td>KB420</td><td>KB425</td><td>DNC250</td><td>KB320</td><td>KB330</td><td>KB370</td><td></td><td></td><td></td></tr> </table>	P	Steel	KB320	KB330	KB350	KB360							K	Cast iron	KB410	KB350	KB370								S	HRSA	KB370										H	Hardened steel	KB410	KB420	KB425	DNC250	KB320	KB330	KB370				
P	Steel	KB320	KB330	KB350	KB360																																													
K	Cast iron	KB410	KB350	KB370																																														
S	HRSA	KB370																																																
H	Hardened steel	KB410	KB420	KB425	DNC250	KB320	KB330	KB370																																										
PCD	<table border="1"> <tr><td>N</td><td>Non-ferrous metal</td><td>DP90</td><td>DP150</td><td>DP200</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	N	Non-ferrous metal	DP90	DP150	DP200																																												
N	Non-ferrous metal	DP90	DP150	DP200																																														
Diamond Coating	<table border="1"> <tr><td rowspan="3">N</td><td>Turning</td><td>ND1000</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Milling</td><td>ND2000</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Endmills</td><td>ND3000</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	N	Turning	ND1000										Milling	ND2000										Endmills	ND3000																								
N	Turning		ND1000																																															
	Milling		ND2000																																															
	Endmills	ND3000																																																
DLC Coating	<table border="1"> <tr><td rowspan="3">N</td><td>Turning</td><td>PD1000</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Milling</td><td>PD2000</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>Endmills</td><td>PD3000</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	N	Turning	PD1000										Milling	PD2000										Endmills	PD3000																								
N	Turning		PD1000																																															
	Milling		PD2000																																															
	Endmills	PD3000																																																
Wear resistance Tool	Ultra fine grain cemented carbide	<table border="1"> <tr><td>Z</td><td>Ultra fine grain cemented carbide</td><td>FS1</td><td>FA1</td><td>FCC</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	Z	Ultra fine grain cemented carbide	FS1	FA1	FCC																																											
	Z	Ultra fine grain cemented carbide	FS1	FA1	FCC																																													
Uncoated carbide	<table border="1"> <tr><td>V</td><td>Wear parts</td><td>D1</td><td>D2</td><td>D3</td><td>G5</td><td>G6</td><td>K20G</td><td></td><td></td><td></td><td></td></tr> <tr><td>I</td><td>Corrosion resistance</td><td>IN10</td><td>IN20</td><td>IN40</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	V	Wear parts	D1	D2	D3	G5	G6	K20G					I	Corrosion resistance	IN10	IN20	IN40																																
V	Wear parts	D1	D2	D3	G5	G6	K20G																																											
I	Corrosion resistance	IN10	IN20	IN40																																														
Mining Tool	Uncoated carbide	<table border="1"> <tr><td>E</td><td>General</td><td>GR10</td><td>GR20</td><td>GR30</td><td>GR35</td><td>GR40</td><td>GR50</td><td></td><td></td><td></td><td></td></tr> </table>	E	General	GR10	GR20	GR30	GR35	GR40	GR50																																								
E	General	GR10	GR20	GR30	GR35	GR40	GR50																																											






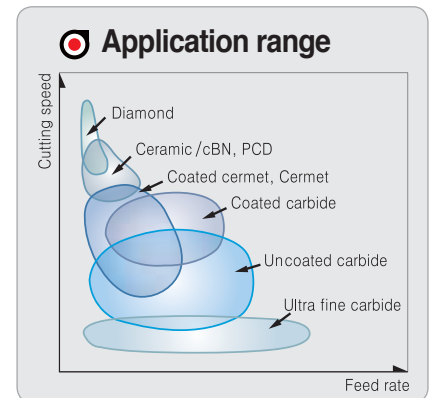


The best way to choose KORLOY turning inserts

Selection system

	P Steel					M Stainless steel				K Cast iron				N Nonferrous			S HRSA				H Hardened		
	P01	P10	P20	P30	P40	P50	M10	M20	M30	M40	K01	K10	K20	K30	N10	N20	N30	S10	S20	S30	S40	H01	H10
Coated carbide	NC3010					PC8110				NC6205 <i>New</i>				ND1000			PC8110				PC8110		
	NC3220 <i>New</i>					NC9025				NC6210 <i>New</i>				PD1000			PC5300						
	NC3120					PC5300				NC315K							PC5400 <i>New</i>						
	NC3030					PC9030				NC5330													
	NC5330					PC5400 <i>New</i>				PC5300													
Cermet	CN1000									CN1000													
	CN2000																						
	CN20																						
cBN/PCD										KB350				DP150							KB320		
										KB360											KB330		
Uncoated carbide	ST05					U10				H02				H01							H01		
	ST10					U20				H01				H01									
	ST15					U40				H05				H01									
	ST20									H10				H01									
	ST30N									G10				H01									
	ST40													H01									
	ST30													H01									
	ST46													H01									
ST45													H01										

Application range of turning grades

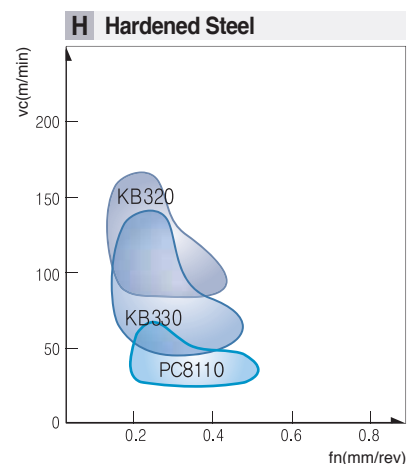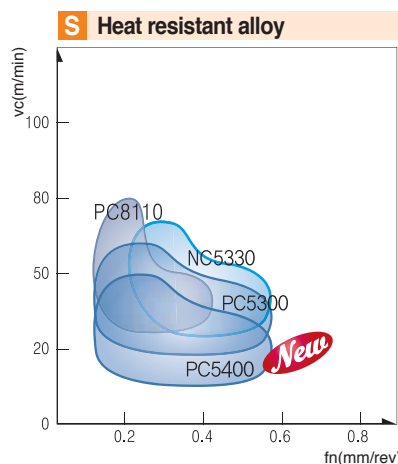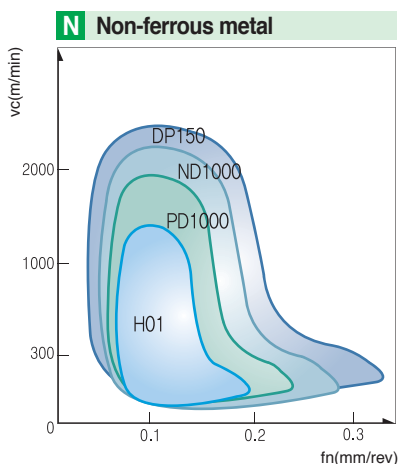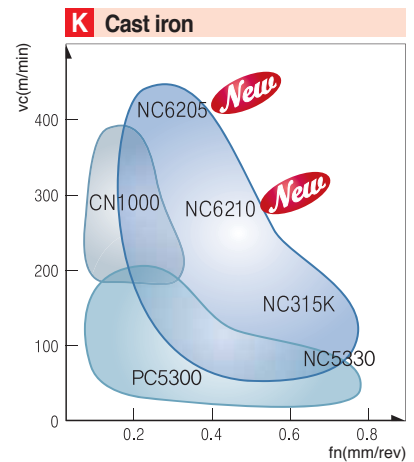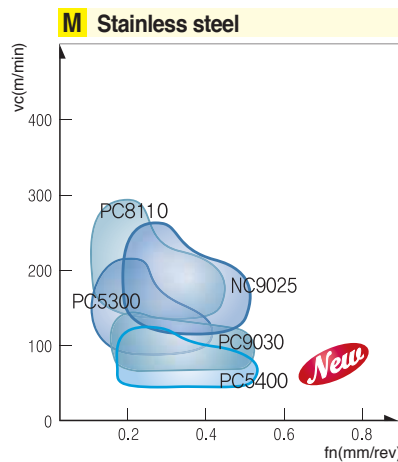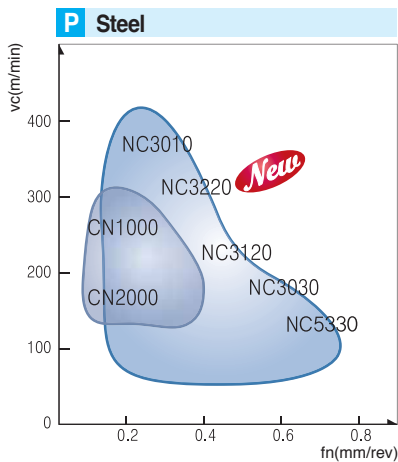



CVD coated Grade

Grade for all applications of steel

NC3220 *New*

- NC 3220 covers a wide application range for all kinds of steels (carbon steel, alloy steel, forged steel, rolled steel, tool steel, mild steel, bearing steel and other special steels) in both continuous and interrupted machining
- New substrate and new coating layer with good wear resistance provides longer tool life preventing plastic deformation in high speed and high temperature machining
- Improved coating layer with superior adhesion and new surface treatment provides excellent welding resistance and chipping resistance that leads to stability of machining and improvements in productivity
- Increased lubrication of coating layer improves the surface finish and reduces the cutting load to increase wear resistance.

Coating structure

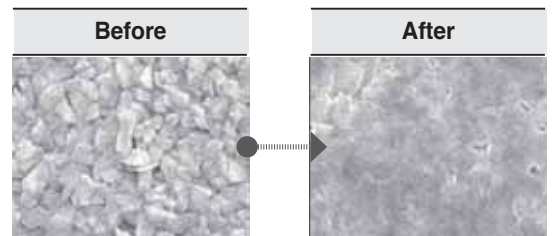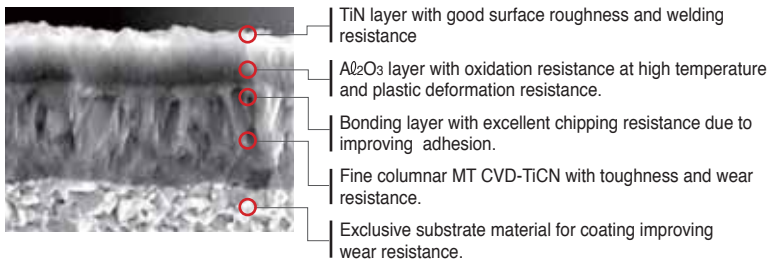



New technology of surface treatment improves welding resistance and stability in machining.

CVD turning grade for Cast iron


NC6205 *New* NC6210 *New*

- K-Power coating
- NC6205 - Superior cutting performance in continuous and high speed machining
- NC6210 - Stable tool life in continuous and interrupted turning

Features

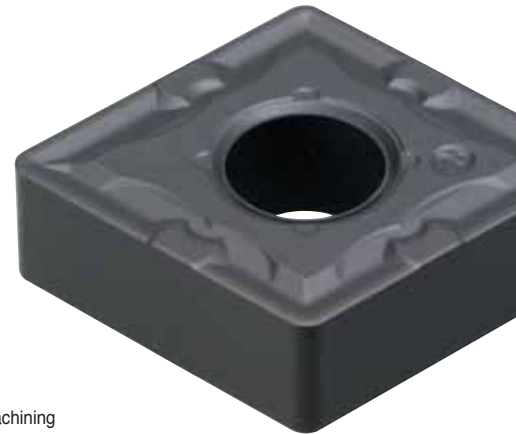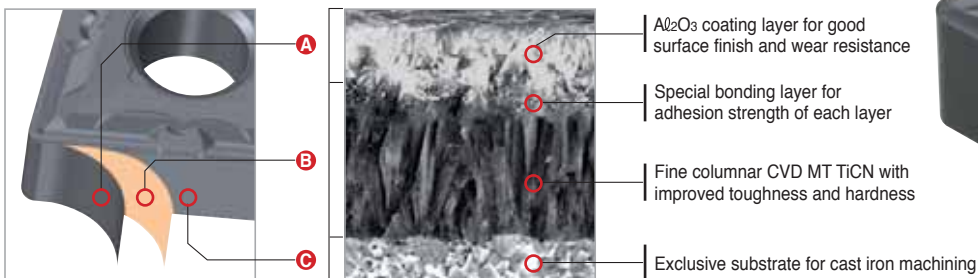

K-Power coating



Outermost layer

Al₂O₃ layer with superior lubrication guarantees wear resistance and chipping resistance in high speed machining



Bonding layer (between MT-TiCN and Al₂O₃ layer)

Special bonding layer with superb adhesion strength improves flaking resistance and chipping resistance



Selection system

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	NC3010	300 (200~400)	P01	
				P10	
				P15	
	Interrupted cutting	NC3220 <i>New</i>	280 (150~380)	P20	
		NC3120	250 (150~350)	P30	
		NC3030	200 (150~250)	P35	
Interrupted cutting	NC5330	190 (100~230)	P40		
	NC500H	100 (50~150)			
M Stainless steel	Continuous cutting	NC9025	140 (80~220)	M30	
	Interrupted cutting			M40	
K Cast iron	Continuous cutting	NC6205 <i>New</i>	450 (250~550)	K05	
		NC6210 <i>New</i>	350 (250~450)	K10	
	Interrupted cutting	NC315K	200 (150~250)	K20	
		NC5330	180 (130~230)	K30	
S HRSA	Continuous cutting	NC5330	40 (20~60)	S20	
	Interrupted cutting			S30	

The features of CVD turning grades

CVD Coated grades	ISO	Features
NC3010	P05 ~ P15	<ul style="list-style-type: none"> High speed cutting for steel Combining excellent wear resistance substrate with chipping and heat resistance Al_2O_3:increased stability MT-TiCN + Al_2O_3 + TiN
NC3220 <i>New</i>	P15 ~ P25	<ul style="list-style-type: none"> For medium machining of steel Universal grade combining substrate with wear resistance and toughness and Al_2O_3:coating with oxidation resistance and fracture resistance • Special treatment on the outermost layer MT-TiCN + Al_2O_3 + TiN
NC3120	P15 ~ P25	<ul style="list-style-type: none"> Medium to roughing for steel Combining excellent fracture resistance substrate with chipping resistance and heat resistance Al_2O_3: increased stability MT-TiCN + TiC + Al_2O_3
NC3030	P25 ~ P35	<ul style="list-style-type: none"> For general cutting, interrupted cutting and roughing operations in steel and stainless steel Combining excellent fracture resistance substrate with chipping resistance and heat resistance Al_2O_3: increased stability in wide ranges of cutting conditions MT-TiCN + TiC + Al_2O_3 + TiN
NC5330	P30 ~ P40 M25 ~ M35 K15 ~ K25 S15 ~ S25	<ul style="list-style-type: none"> Stainless Steel/General Cutting for Mild Steel & Forging Steel MT-TiCN + Al_2O_3 + TiN
NC9025	M25 ~ M35	<ul style="list-style-type: none"> Stainless Steel/General Cutting for Mild Steel & Forging Steel MT-TiCN + Al_2O_3 + TiN
NC500H	P25 ~ P35	<ul style="list-style-type: none"> Heavy interrupted cutting for steel Plastic deformation and fracture resistance substrate with chipping resistance and heat resistance Al_2O_3: increased stability in wide ranges of cutting conditions MT-TiCN + TiC + Al_2O_3 + TiN
NC6205 <i>New</i>	K01 ~ K10	<ul style="list-style-type: none"> General cutting for gray cast iron and ductile cast iron High hardness substrate and improved adhesion of thick Al_2O_3: show superior wear resistance MT-TiCN + Al_2O_3
NC6210 <i>New</i>	K05 ~ K15	<ul style="list-style-type: none"> General cutting for gray cast iron and ductile cast iron Tough substrate and improved adhesion of thick Al_2O_3: show superior wear resistance MT-TiCN + Al_2O_3
NC315K	K10 ~ K20	<ul style="list-style-type: none"> Interrupted cutting and high-efficiency machining for cast iron Tough substrate and improved adhesion of thick Al_2O_3: show superior wear resistance MT-TiCN + Al_2O_3 + TiN




Cutting performance (NC3220)

P Alloy Steel (SCR420H, hot forging)

- Cutting condition**
 - vc(m/min) = 360~430
 - fn(mm/rev) = 0.2
 - ap(mm) = 1.2~1.5
 - (external machining / facing)
 - wet

- Designation**
 - INSERT CNMG120408-VB
 - HOLDOR PCLNR2525-M12

Test result

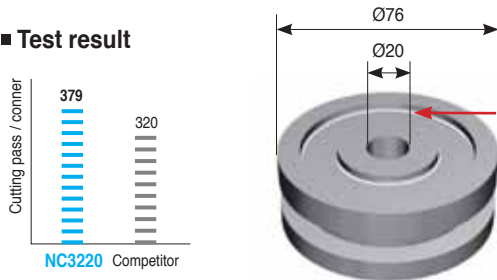


P Carbon Steel(S48C, cold forging)

- Cutting condition**
 - vc(m/min) = 280
 - fn(mm/rev) = 0.2~0.25
 - ap(mm) = 1
 - dry

- Designation**
 - INSERT CNMG120412-VB
 - HOLDOR PCLNR2525-M12

Test result

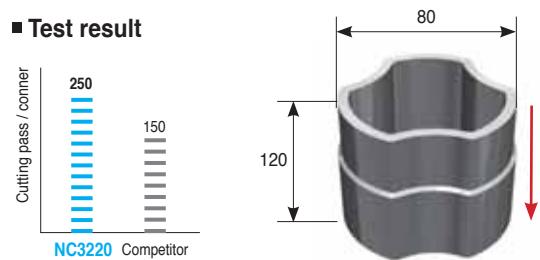


P Alloy Steel (SCM420H, hot forging)

- Cutting condition**
 - vc(m/min) = 80~500
 - fn(mm/rev) = 0.15~0.3
 - (External machining / facing / grooving / tapping)
 - ap(mm) = 0.7~1.5
 - wet

- Designation**
 - INSERT DNMG150608-VB
 - HOLDOR PDJNR2525-M15

Test result

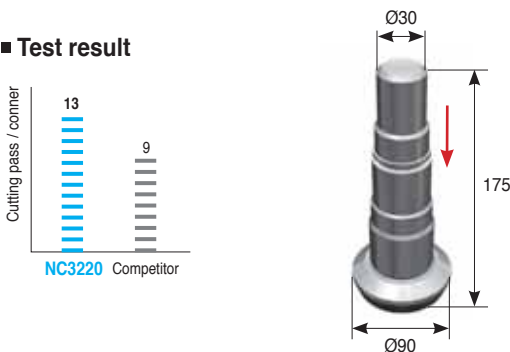


P Carbon Steel(S53C, cold forging)

- Cutting condition**
 - vc(m/min) = 280
 - fn(mm/rev) = 0.2~0.25
 - (External machining / internal machining)
 - ap(mm) = 1
 - dry

- Designation**
 - INSERT DNMG150608-VB
 - HOLDOR PDJNR2525-M15

Test result

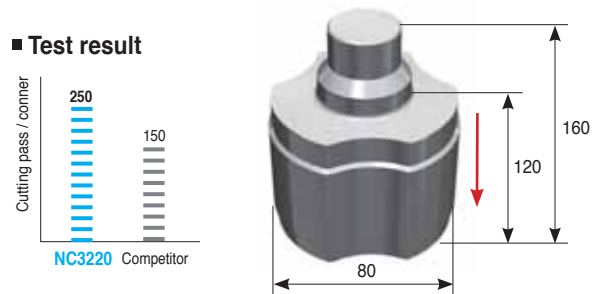


P Alloy Steel (SCR series, cold forging)

- Cutting condition**
 - vc(m/min) = 314
 - fn(mm/rev) = 0.25
 - (external machining / facing)
 - ap(mm) = 1
 - wet

- Designation**
 - INSERT CNMG120408-VM
 - HOLDOR PCLNR2525-M12


Test result

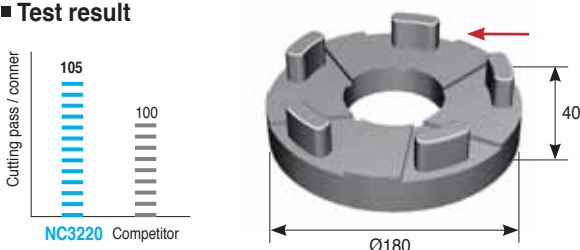

Cutting performance (NC6205 / NC6210)


K Gray cast iron(GC250), in high speed machining

- Cutting condition**
 - vc(m/min) = 600
 - fn(mm/rev) = 0.30
 - ap(mm) = 1.5
 - dry
 - Continuous external machining
- Designation**
 - INSERT CNMA120408 (NC6205, NC6210)
 - HOLDER DCLNL3232-P12

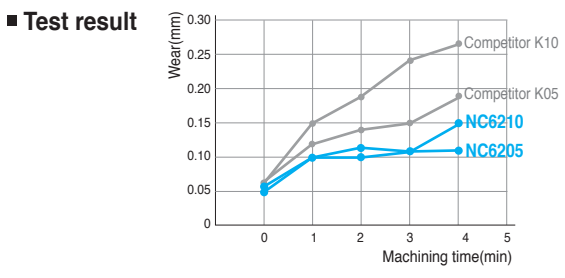

K Ductile cast iron(GCD600), in interrupted machining

- Cutting condition**
 - vc(m/min) = 120
 - fn(mm/rev) = 0.30
 - ap(mm) = 1.5
 - wet
 - Interrupted facing
- Designation**
 - INSERT CNMA120408 (NC6205, NC6210)
 - HOLDER DCLNL3232-P12

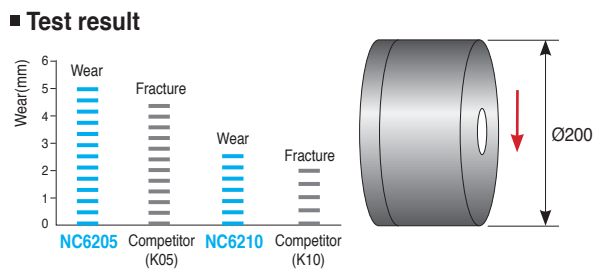


K Gray cast iron(GC250), Brake Disc

- Cutting condition**
 - vc(m/min) = 390
 - fn(mm/rev) = 0.25
 - ap(mm) = 2.0
 - wet
- Designation**
 - INSERT CNMG120412-VK(NC6210)
 - HOLDER PCLNR2525-M12




K Gray cast iron(GC250), Nipple

- Cutting condition**
 - vc(m/min) = 350
 - fn(mm/rev) = 0.25
 - ap(mm) = 0.7
 - wet
- Designation**
 - INSERT CNMG120408-VK(NC6210)
 - HOLDER DCLNR2525-M12

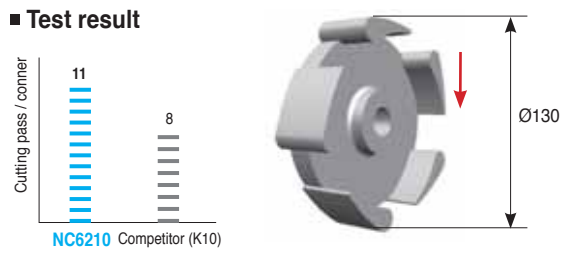

K Ductile cast iron(GCD550), Shaft

- Cutting condition**
 - vc(m/min) = 120
 - fn(mm/rev) = 0.28
 - ap(mm) = 2.0
 - wet
- Designation**
 - INSERT WNMG080412-VK(NC6205)
 - HOLDER DWLNL2525-M08

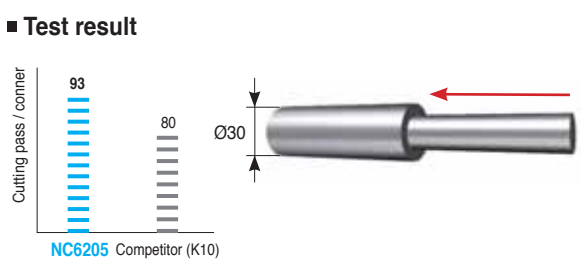


PVD coating Grade

PVD Coated grade for stainless steel and HRSA.

PC8110

- Micro grain carbide minimizes chipping of cutting edge due to enhanced edge strength
- Latest PVD coating technology with high hardness and high temperature oxidation resistance
- PC8110 provides high productivity during machining HRSA material in high speed, high feed cutting conditions

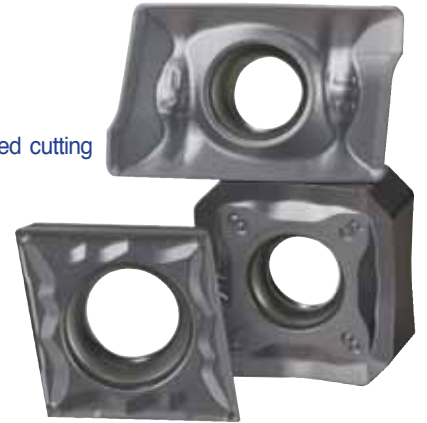


PVD turning grade for stainless steel and HRSA


PC5300

- High efficiency during machining of carbon steel / cast iron / stainless steel / HRSA
- Stable machining due to specific carbide substrate with strong toughness and high hardness that reduces fracture by chipping
- Excellent wear resistance due to special PVD coating film with oxidation resistance, thermal stability, and surface smoothness

Coating structure



Latest PVD coating technology developed by KORLOY
New concept of coating with high temperature oxidation resistance and high hardness

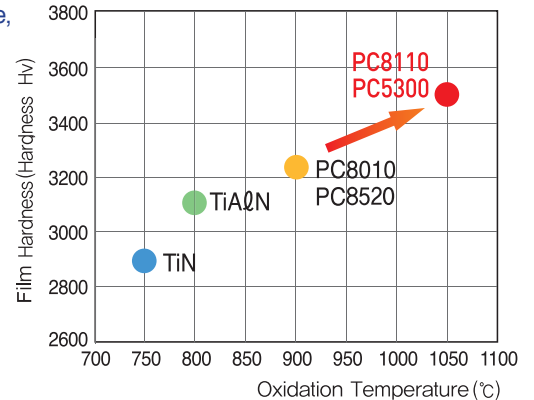

PVD grade for turning of heat resisting alloy and stainless steel

PC5400 *New*

- New PVD coating layer with high toughness and lubrication
- High adhesive strength between substrate with high toughness and the coating layer
- Excellent cutting edge strength and chipping resistance ensure stable machinability for P, M, K, S.

Selection system

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	PC5300	150(120~220)	P30	PC5300
	Interrupted cutting			P40	
	Interrupted cutting	PC5400 <i>New</i>	150(120~220)	P50	PC5400 <i>New</i>
M Stainless steel	Continuous cutting	PC8110	200(150~250)	M10	PC8110
		PC5300	170(120~220)	M20	PC5300
	Interrupted cutting	PC9030	120(50~180)	M30	PC9030
		PC5400 <i>New</i>	120(50~180)	M40	PC5400 <i>New</i>
S HRSA	Continuous cutting	PC8110	60(40~90)	S10	PC8110
	Interrupted cutting	PC5300	50(30~70)	S20	PC5300
		PC5400 <i>New</i>	40(20~60)	S30	PC5400 <i>New</i>
			S40	PC5400 <i>New</i>	



🎯 The features of PVD coated grades

PVD Coated grades	ISO	Features
PC9030	M30 ~ M40	<ul style="list-style-type: none"> • Medium, roughing and heavy interrupted cutting for stainless steel • TiAlN coating and ultra fine grain substrate adopted • High chipping and welding resistance for stable machining
PC8110	M10 ~ M20 S10 ~ S20	<ul style="list-style-type: none"> • High speed and continuous machining for stainless & HRSA • High chipping and welding resistance longer tool life • New TiAlN coating and ultra fine grain substrate adopted
PC5300	P30 ~ P40 M20 ~ M30 K20 ~ K25 S20 ~ S30	<ul style="list-style-type: none"> • Universal grade for stainless, HRSA, steel and interrupted cast iron machining • High chipping and welding resistance for longer tool life • New TiAlN coating and ultra fine grain substrate adopted
PC5400 New	P40 ~ P50 M30 ~ M40 K25 ~ K35 S25 ~ S35	<ul style="list-style-type: none"> • For medium cutting for hard-to-cut materials, stainless steel, steel, and cast iron at medium or low speed • Stable machinability with chipping resistance, fracture resistance and welding resistance • Ultra fine substrate with high toughness and new AlCrN layer



Cutting performance (PC8110)

S Inconel 718

- Cutting condition**
 vc(m/min) = 60
 fn(mm/rev) = 0.2
 ap(mm) = 2
 wet
 (4min machining)

- Designation**
 INSERT CNMG120408-HS
 HOLDER DCLNL2525-M12

Test result

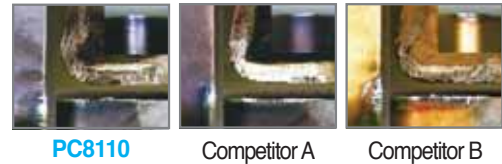



S Titanium

- Cutting condition**
 vc(m/min) = 70
 fn(mm/rev) = 0.2
 ap(mm) = 1
 wet
 (8min machining)

- Designation**
 INSERT CNMG120408-HA
 HOLDER PCLNR2525-M12

Test result

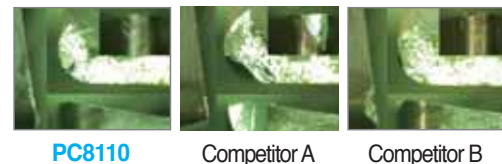



M S Stainless steel(Stellite welded)

- Cutting condition**
 vc(m/min) = 60
 fn(mm/rev) = 0.2
 ap(mm) = 2
 wet

- Designation**
 INSERT CNMG120408-GS
 HOLDER DCLNL2525-M12

Test result

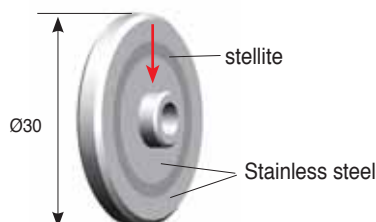



S Inconel 625

- Cutting condition**
 vc(m/min) = 60
 fn(mm/rev) = 0.2
 ap(mm) = 2
 wet

- Designation**
 INSERT DNMG150608-HS
 HOLDER DDLNL2525-M15

Test result





Cutting performance (PC5300)

M Stainless steel (STS304)

- Cutting condition**
 $vc(m/min) = 282$
 $fn(mm/rev) = 0.2$
 $ap(mm) = 3$
 wet

- Designation**
 INSERT CNMG120408-HS
 HOLDER DCLNL2525-M12

Test result





M Stainless steel (STS316)

- Cutting condition**
 $vc(m/min) = 120$
 $fn(mm/rev) = 0.2$
 $ap(mm) = 0.5\sim 1.5$
 wet

- Designation**
 INSERT SNMG120408-GS
 HOLDER DSBNL2525-M12

Test result




Cutting performance (PC5400)

M Stainless steel (STS304)

- Cutting condition**
 $vc(m/min) = 110$
 $fn(mm/rev) = 0.25$
 $ap(mm) = 1.0\sim 2.0$
 wet

- Designation**
 INSERT CNMG120408-VP3
 HOLDER DCLNL2525-M12

Test result




KORLOY Uncoated Carbide Grades

🎯 Features

- ▶ Korloy's uncoated cemented carbides are designed to optimize machining with uniform quality. Furthermore, Korloy's cemented carbides are manufactured with the highest quality tungsten carbides, cobalt, and refractory carbides (TiC, TaC) to produce superior toughness and wear resistance


[Microstructure]

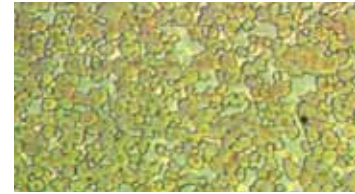

P

🎯 Advantages

- ▶ P.M.K cemented carbide can be applied for various workpiece
- ▶ Excellent thermal crack resistance makes it possible to machine in wet cutting conditions
- ▶ Fine grain and minimizing chemical affinity to workpiece Specially designed by Korloy
- ▶ High toughness and low cutting force

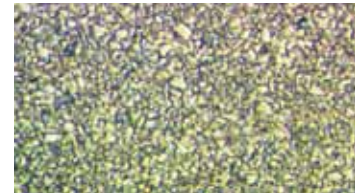

K

🎯 Selection system

Workpiece	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P	Steel	ST10	150 (100 ~ 200)	P10
		ST15	140 (90 ~ 190)	P20
		ST20	130 (70 ~ 180)	P30
		ST30A	130 (70 ~ 180)	
K	Cast iron	H02	150 (100 ~ 200)	K01
		H01, H05	140 (100 ~ 200)	K10
		H10, G10	130 (90 ~ 190)	K20
	Alloyed aluminum	H01	500 (300 ~ 800)	K30
	Alloyed copper	H01	200 (150 ~ 300)	

🎯 Main application

ISO	Composition	Features	Workpiece
P	WC-TiC-TaC-Co	Heat resistance, excellent plastic deformation resistance	Carbon steel, Alloy steel, Stainless steel
M	WC-TiC-TaC-Co	General tools stable heat resistance with strength	Carbon steel, Alloy steel, Stainless steel, Cast steel
K	WC-Co	High strength and superior wear resistance	Cast iron, Non-ferrous metal, Plastic, etc

🎯 Properties of Uncoated Carbide

ISO	Grade	Hardness (HrA)	TRS (kgf/mm ²)	Young's modulus (10 ³ kgf/mm ²)	Thermal expansion coefficient(10 ⁻⁶ /°C)	Thermal conductivity (cal/cm · sec·°C)
P	ST05	92.7	140	-	-	-
	ST10	92.1	175	48	6.2	25
	ST20	91.9	200	56	5.2	45
	ST30A	91.3	230	53	5.2	-
M	U10	92.4	170	47	-	-
	U20	91.1	210	-	-	88
	ST30A	91.3	230	53	5.2	-
	A40	89.2	270	-	-	-
K	H02	93.2	185	61	4.4	105
	H01	92.9	210	66	4.7	109
	G10	90.9	250	63	-	105

kPa = 102kg/mm², 1W/mk = 2.39x10⁻³cal/cm·sec·°C



Cermet Grade


For steel, cast iron, other sintering alloy steel(P10, K10)

Continuous cutting exclusive cermet


CN1000

- Functionally gradient cermet materialization leads excellent quality on both non-grinding and grinding inserts
- Due to increase of plastic deformation resistance, it maintains superior wear resistance and precision on workpiece dimension over long period usage with wet and dry cutting conditions
- Improved adhesion wear resistance on upper part and cutting edge, reduces tool s cutting load and makes surface finishing smooth after machining
- New cermet grade for finishing of cast iron, carbon steel, alloy steel, and other sintered steels

[Microstructure of Ticn-based cermets]

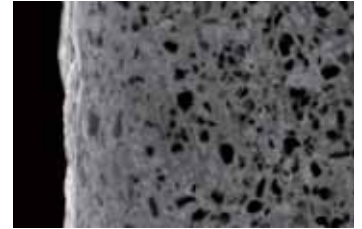

Surface

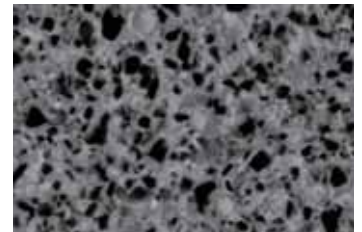

Core

Selection system

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	CN1000	280 (150 ~ 400)	P10	CN1000
	Interrupted cutting	CN20	210 (120 ~ 300)	P20	CN20
CN2000		CN2000			
K Cast iron	Finishing	CN1000	280 (150 ~ 400)	K01 K10	CN1000

The features of KORLOY main cermet grade

Cermet	ISO	Features
CN1000	P05 ~ P15 / K05 ~ K10	<ul style="list-style-type: none"> Cermet for finishing for steel, cast iron and sintered metals Functionally gradient material cermet as a next generation cermet
CN2000	P10 ~ P20	<ul style="list-style-type: none"> Wide ranges from finishing to roughing in steel machining Functionally gradient material cermet as a next generation cermet
CN20	P10 ~ P20	<ul style="list-style-type: none"> For general turning and milling for steel General purpose grade provided with both wear resistance and toughness CN20 : main grade for machining bearing


Properties of cermet

ISO	Grade	Hardness	TRS	Specific Gravity
P	CN1000	< 1900	< 180	6.5 ~ 7.5
	CN2000	< 1800	< 210	6.8 ~ 7.0
	CN20	< 1600	< 220	6.7 ~ 7.0
K	CN1000	< 1900	< 180	6.5 ~ 7.5



KORLOY Coated Cermet Grades

- Features**
- ▶ Impact resistance and superior toughness substrate prevents chipping and fracture at the initial stage ensuring longer tool life
 - ▶ Lubricant coating layer improves chip flow and reduces insert load

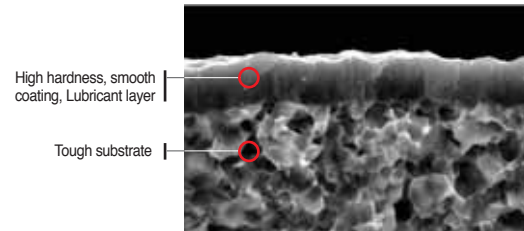

Selection system

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	CC105	350 (250 ~ 450)	P05	
	Interrupted cutting	CC115	280 (230 ~ 400)	P10	
		CC125	230 (150 ~ 300)	P20	

The features of KORLOY coated cermet grade

Coated cermet	ISO	Features
CC105	P01 ~ P10	<ul style="list-style-type: none"> • PVD coated Cermet • Light cutting for steel and cast iron in high speed machining • Optimized for precision boring
CC115	P10 ~ P20	<ul style="list-style-type: none"> • PVD coated Cermet • Light cutting for steel and cast iron in medium or high speed machining • Dry and wet cutting are available
CC125	P15 ~ P25	<ul style="list-style-type: none"> • PVD coated Cermet • High toughness cermet for milling




Cutting performance(CN1000)

P Carbon steel (SM45C)

- Cutting condition**
 - vc(m/min) = 400
 - fn(mm/rev) = 0.2
 - ap(mm) = 1.0
 - wet
 - (20min machining)

- Designation**
 - INSERT CNMG120408-VG
 - HOLDER PCLNL2525-M12

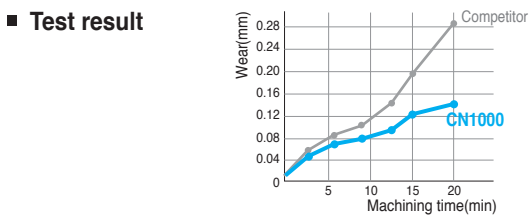

CN1000




Competitor

K Cast iron(GC250)

- Cutting condition**
 - vc(m/min) = 300
 - fn(mm/rev) = 0.2
 - ap(mm) = 1.0
 - wet
 - (21min machining)

- Designation**
 - INSERT CNMG120408-B25
 - HOLDER PCLNR3232-P12

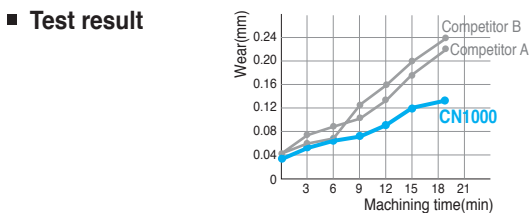

CN1000



Competitor A





Competitor B

P Carbon steel (SM45C)

- Cutting condition**
 - vc(m/min) = 250
 - fn(mm/rev) = 0.1
 - ap(mm) = 0.2
 - wet

- Designation**
 - INSERT VNMG160404-VG
 - HOLDER MVQNR2525-M16

- Test result**

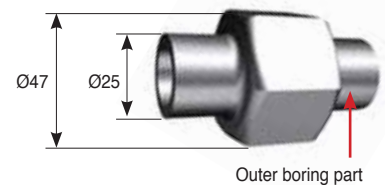



Outer boring part

P Alloy steel (SCM420H)

- Cutting condition**
 - vc(m/min) = 250
 - fn(mm/rev) = 0.18
 - ap(mm) = 0.5
 - wet

- Designation**
 - INSERT DCMT11T304-C25
 - HOLDER SDJCR2020-K11

- Test result**

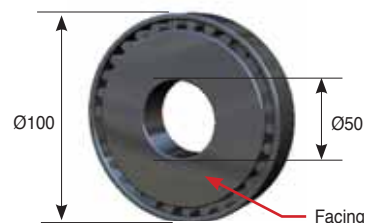



Facing

P Sintered ferrous metals

- Cutting condition**
 - vc(m/min) = 338
 - fn(mm/rev) = 0.2
 - ap(mm) = 0.5
 - wet

- Designation**
 - INSERT CNMG120408-B25
 - HOLDER PCLNR3232-P12

- Test result**

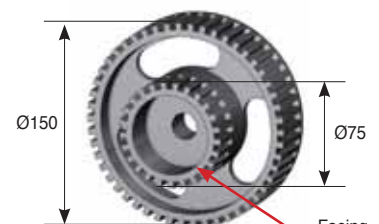


Facing




The best way to choose KORLOY Milling inserts

Selection system

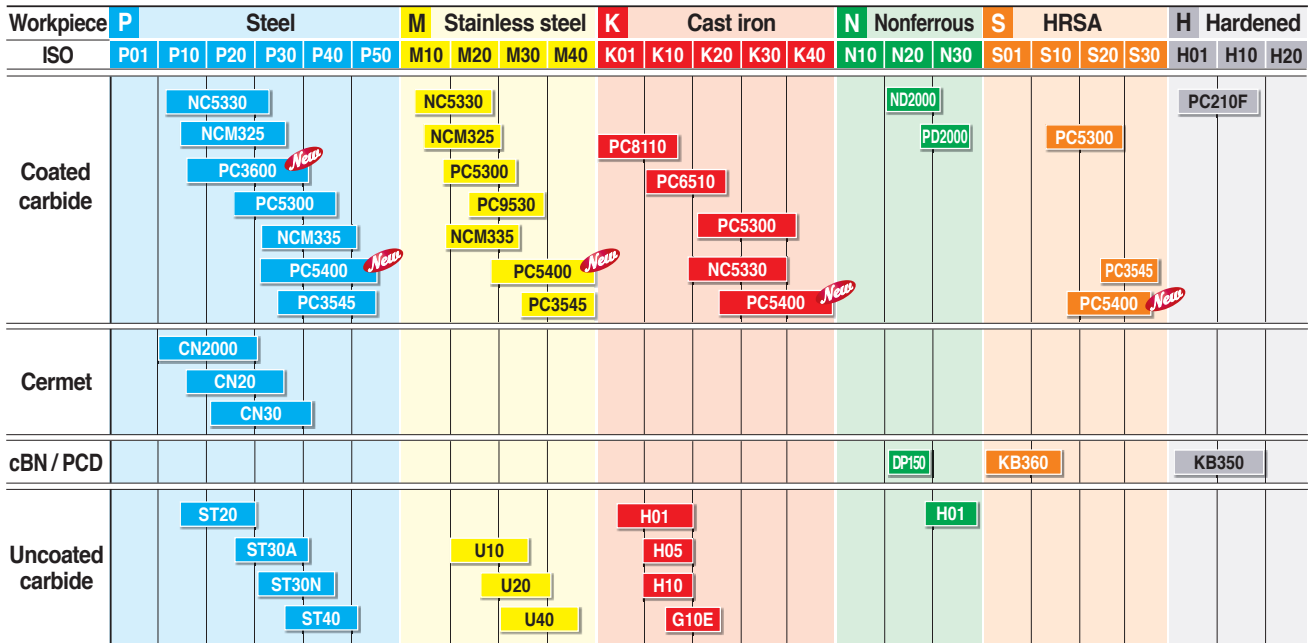

Application range of Milling grades

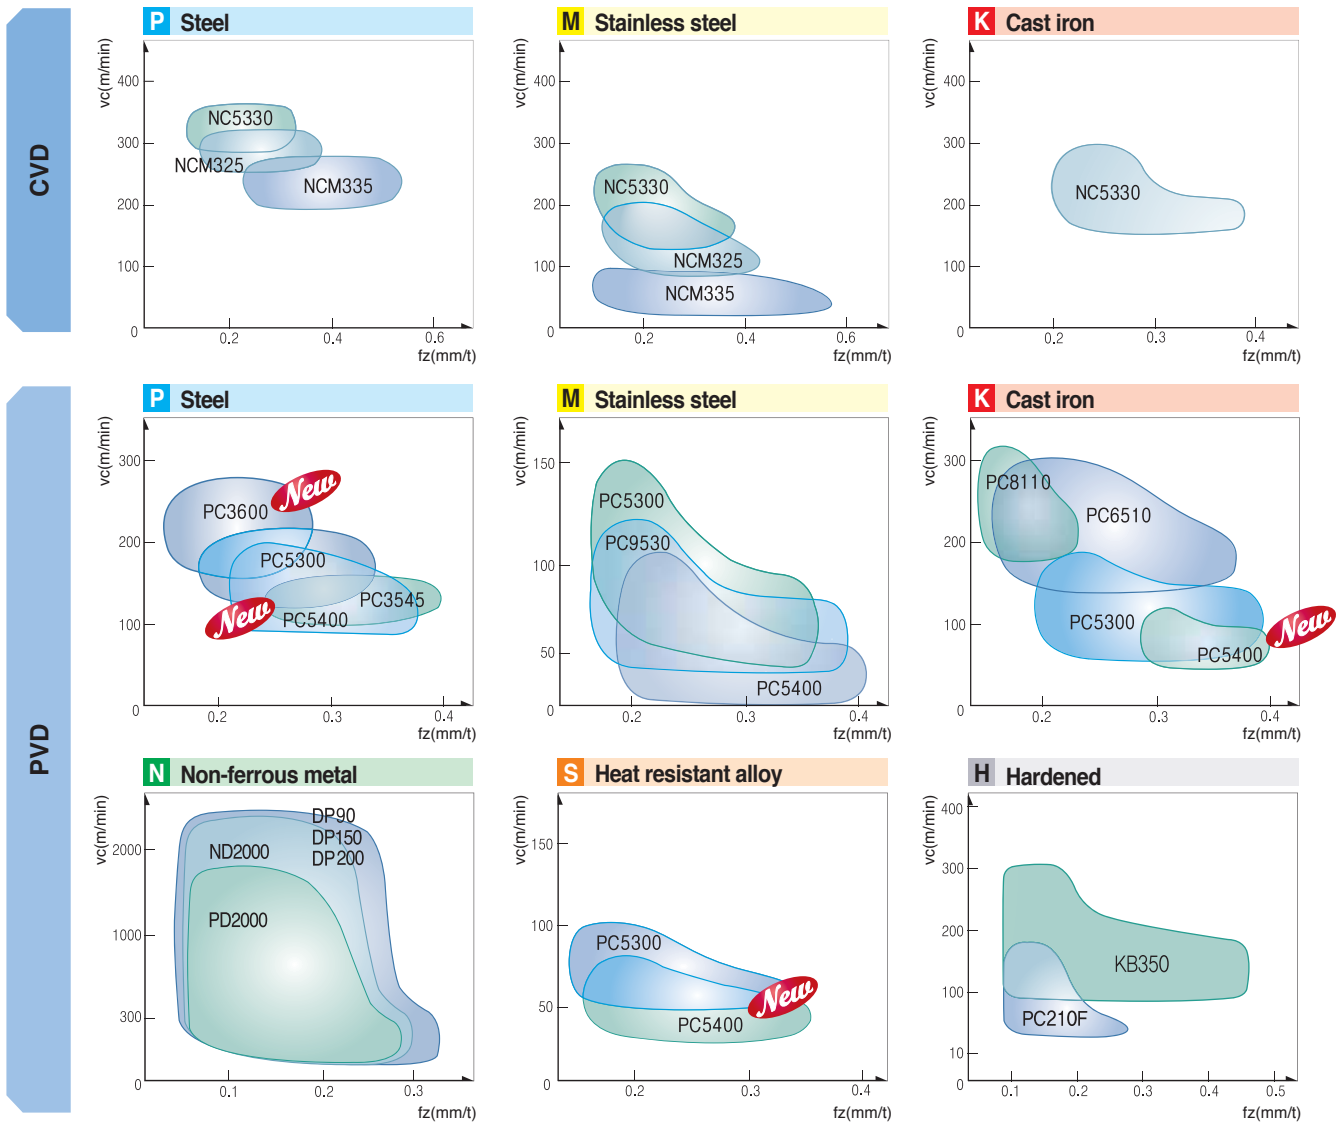


CVD Coated grade

CVD Coated grade for stainless steel and soft steel

NC5330

- Tough carbide, smooth coating for improved tool life
- Built-up-edge resistance, notch wear resistance, and the toughness have been improved
- Outstanding performance for stainless steel machining
- Excellent for machining sticky, soft steels, and forged steels
- Superior tool life for machining hard to cut material such as inconel and stellite

Coating structure



- TiN film : Smooth surface roughness and superior anti built-up-edge
- Fine columnar TiCN film : Optimal toughness and hardness
- Toughest dedicated carbide substrate employed
- Al₂O₃ film : Excellent oxidation resistance



Selection system

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	NC5330	270(220~320)	P15	
				P20	
	Continuous cutting	NCM325	250(150~300)	P25	
				P30	
Interrupted cutting	NCM335	230(120~280)	P35		
			P40		
M Stainless steel	Continuous cutting	NC5330	200(150~250)	M10	
				M20	
	Continuous cutting	NCM325	180(140~230)	M30	
M40					
Interrupted cutting	NCM335	170(120~210)	M40		
K Cast iron	Continuous cutting	NC5330	170(130~220)	K20	
				K30	

The features of CVD Milling grades


CVD Coated grades	ISO	Features
NC5330	P15 ~ P25 M10 ~ M20 K10 ~ K20	<ul style="list-style-type: none"> • For high speed milling of steel and stainless steel • Superior wear resistance and chipping resistance grade for steel and stainless steel • MT-TiCN + Al₂O₃ + TiN
NCM325	P20 ~ P30 M20 ~ M30	<ul style="list-style-type: none"> • For high speed milling of steel and stainless steel • Optimized grade for steel & stainless steel by employing proper substrate and hard coating • MT-TiCN + Al₂O₃ + TiN
NCM335	P30 ~ P40 M30 ~ M40	<ul style="list-style-type: none"> • For interrupted and rough milling of steel and stainless steel • Toughest substrate with hard coating provides stable cutting and tool life for severe interrupted cutting • MT-TiCN + Al₂O₃ + TiN



Cutting performance(NC5330)


P Alloy steel (SCM440)

- Cutting condition**
 - vc(m/min) = 250
 - fz(mm/t) = 0.30
 - ap(mm) = 2.0
 - dry
- Designation**
 - INSERT SDKN1504AESN-SU
 - CUTTER ADN5125R
- Test result**

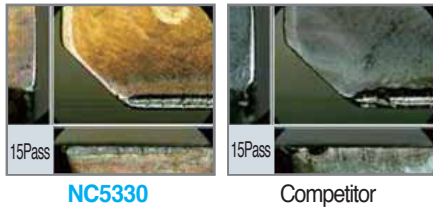


P Alloy steel (SCM440H)

- Cutting condition**
 - vc(m/min) = 130
 - fz(mm/t) = 0.30
 - ap(mm) = 3.5
 - dry
- Designation**
 - INSERT HS004072
- Test result**

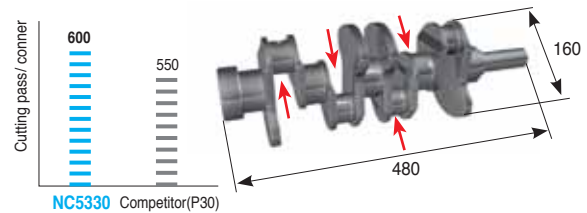


P Stainless steel (STS304)

- Cutting condition**
 - vc(m/min) = 150
 - fz(mm/t) = 0.25
 - ap(mm) = 2.0
 - dry
- Designation**
 - INSERT SDKN1504AESN-SU
 - CUTTER ADN5125R
- Test result**

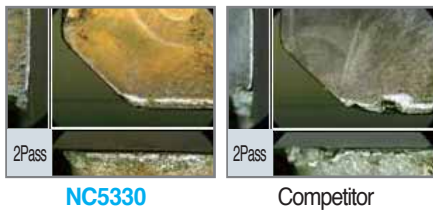


K Ductile cast iron (GCD500)

- Cutting condition**
 - vc(m/min) = 200
 - fz(mm/t) = 0.20
 - ap(mm) = 5.0
 - dry
- Designation**
 - INSERT SDKN1504AESN-SU
 - CUTTER ADN5100R
- Test result**

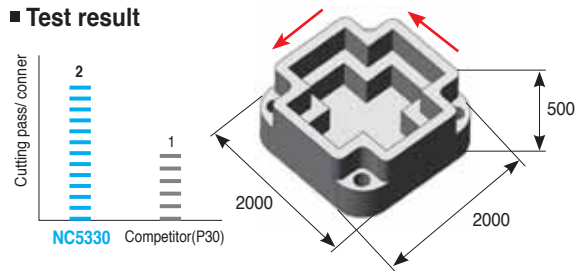


P Carbon steel (SM45C)

- Cutting condition**
 - vc(m/min) = 275
 - fz(mm/t) = 0.13
 - ap(mm) = 7.0
 - wet
- Designation**
 - INSERT TNMX2710AZNR-NM
 - CUTTER PBACM5125R-M
- Test result**

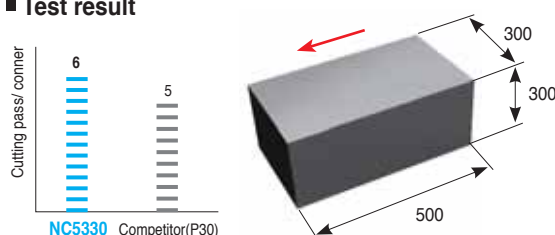

K Gray cast iron(GC400)

- Cutting condition**
 - vc(m/min) = 355
 - fz(mm/t) = 0.16
 - ap(mm) = 5.0
 - dry
- Designation**
 - INSERT SPKN1504EDSR-SU
 - CUTTER EPNM5100R
- Test result**

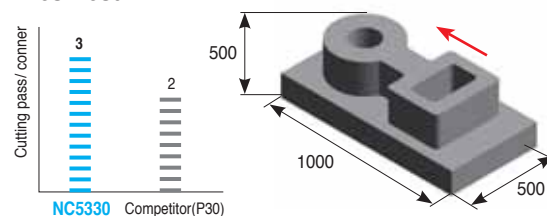

PVD coating Grade

PVD new grade for steel milling

PC3600(SU/MU) *New*

- Coating layer with high hardness and oxidation resistance at high temperature ensures stable tool life.
- Superior wear resistance and impact resistance in high speed machining of P grade materials
- **SU** : for general purpose - **MU** : for cost efficiency

Universal PVD Grade

PC5300

- High efficiency during machining for carbon steel / cast iron / stainless steel / HRSA
- Stable machining due to specific carbide substrate with strong toughness and high hardness that restrains fracture by chipping
- Excellent wear resistance due to special coating film with oxidation resistance, thermal stability, and surface smoothness




PVD grade for milling of heat resisting alloy and stainless steel

PC5400 *New*

- New PVD coating layer with high toughness and lubrication
- High adhesive strength between substrate with high toughness and the coating layer
- Excellent cutting edge strength and chipping resistance ensure stable machinability for P, M, K, S.

Coating structure

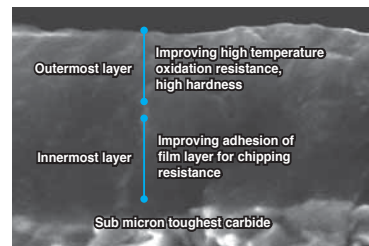

Latest PVD coating technology developed by KORLOY
New concept of coating equipped with high temperature oxidation resistance and high hardness

Selection system

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	PC3600 <i>New</i>	200 (150~250)	P20	
		P30			
	Interrupted cutting	PC5300	120 (100~150)	P40	
		PC5400 <i>New</i> PC3545		P50	
M Stainless steel	Continuous cutting	PC5300	120 (100~150)	M20	
		PC9530	130 (50~200)	M30	
	Interrupted cutting	PC5400 <i>New</i>	120 (100~150)	M40	
K Cast iron	Continuous cutting	PC8110	250 (200~400)	K01	
		PC6510	200 (150~250)	K05	
	Interrupted cutting	PC5300	165 (120~210)	K10	
				K20	
S HSRA	Continuous cutting	PC5300	70(40~100)	S20	
	Interrupted cutting	PC5400 <i>New</i>	50(30~70)	S30	
H High hardness steel	Continuous cutting	PC210F	250(150~300)	H01 H10	



The features of PVD coated grades

PVD Coated grades	ISO	Features
PC3600 <small>NEW</small>	P20 ~ P30	<ul style="list-style-type: none"> Milling grade for medium and roughing of steel New coating layer with superior wear resistance and oxidation resistance with high toughness substrate TiAlN / New coating • Grooving, Cutting, Milling
PC3545	P35 ~ P45	<ul style="list-style-type: none"> Medium and rough milling for steel Enhanced chipping resistant substrate • K-Gold coating
PC5300	P30 ~ P40 S20 ~ S25 M20 ~ M30 K10 ~ K20	<ul style="list-style-type: none"> Superior universal grade for steel, cast iron, hard to cut material, stainless steel New coating and ultra fine grain provide wear resistance and oxidation resistance For turning, milling, grooving, parting, drilling, and threading
PC5400 <small>NEW</small>	P35 ~ P50 S25 ~ S35 M30 ~ M40 K25 ~ K35	<ul style="list-style-type: none"> Universal grade for interrupted machining of steel, cast iron, hard-to-cut materials and stainless steel with stable machinability New coating layer with high toughness and lubrication on ultra fine grain substrate with high toughness AlCIN series new coating • For turning, milling, grooving and drilling
PC8110	K01 ~ K10	<ul style="list-style-type: none"> Medium and rough cutting for hard to cut material and stainless steel Superior wear resistance for finishing cast iron New coating and ultra fine grain provide wear resistance and oxidation resistance For turning, milling, grooving, parting
PC6510	K05 ~ K15	<ul style="list-style-type: none"> High speed milling grade for cast iron and aluminum K-Gold coating
PC9530	M20 ~ M35	<ul style="list-style-type: none"> Milling grade for cast iron and aluminum in medium to low cutting speed The toughest sub-micron substrate provides excellent cutting performance at high feed TiAlN coating • For milling, drilling
PC210F	H01 ~ H10	<ul style="list-style-type: none"> High speed milling grade for hardened steel, cast iron, and stainless steel(Laser Mill) New coating and ultra fine grain provide wear resistance and oxidation resistance Endmilling


Cutting performance (PC3600)

P SS41

- **Cutting condition** $vc(m/min) = 216$
 $fz(mm/t) = 0.39$
 $ap(mm) = 1.0$
 dry

- **Designation** **INSERT** TPKN2204PDSR-SU
CUTTER PPN4125R

■ **Test result**

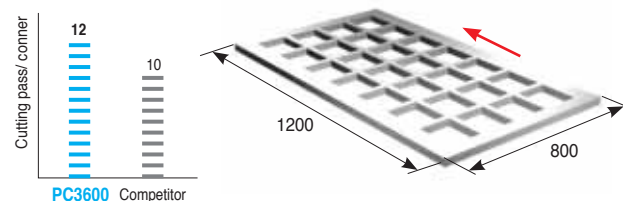


P SCM415

- **Cutting condition** $vc(m/min) = 228$
 $fz(mm/t) = 0.15$
 $ap(mm) = 1.0$
 dry

- **Designation** **INSERT** SDKN1504AESN-SU
CUTTER ADN5315R

■ **Test result**

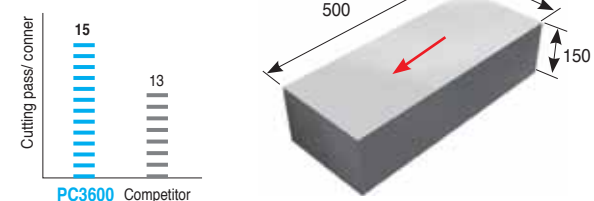


P SM45C

- **Cutting condition** $vc(m/min) = 306$
 $fz(mm/t) = 0.13$
 $ap(mm) = 2.0$
 dry

- **Designation** **INSERT** SDKN1203AESN-SU
CUTTER ADN4315R

■ **Test result**

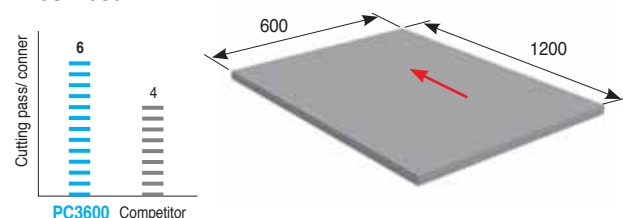

P STD11

- **Cutting condition** $vc(m/min) = 200$
 $fz(mm/t) = 0.2$
 $ap(mm) = 2.0$
 dry

- **Designation** **INSERT** SPKN1504EDSR-SU
CUTTER EPN5160R

■ **Test result (340min machining)**




Cutting performance (PC5300)


P KP4M

■ **Cutting condition** vc(m/min) = 250
fn(mm/rev) = 1.0
ap(mm) = 1.0
dry

■ **Test result**




■ **Designation** INSERT WNMX130520ZNN-MM
CUTTER HRMDCM13050HR-3

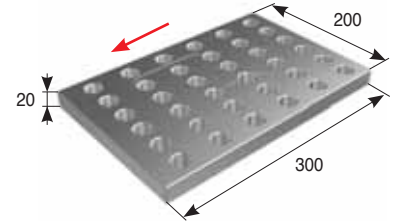


M Stainless steel(STS316)

■ **Cutting condition** vc(m/min) = 65
fn(mm/rev) = 0.14
ap(mm) = 3.0
wet

■ **Test result**



■ **Designation** INSERT SEET14M4AGSN-MM
CUTTER FMACM4100HR





Cutting performance (PC5400)

P SM45C

■ **Cutting condition** vc(m/min) = 250
fz(mm/t) = 1.2
ap(mm) = 1.0
dry

■ **Designation** INSERT WNMX130520ZNN-MM
CUTTER HRMDCM13050HR-4

■ **Test result**





P SCR440

■ **Cutting condition** vc(m/min) = 180
fz(mm/t) = 0.2
ap(mm) = 2.0
dry

■ **Designation** INSERT PDKT1605M0-MM
CUTTER FMRC5063HRD-H

■ **Test result**





M Stainless steel(STS316)

■ **Cutting condition** vc(m/min) = 50
fz(mm/t) = 0.1
ap(mm) = 4.0 ae(mm) = 15.0
dry

■ **Designation** INSERT APMT1604PDSR-MM
CUTTER AMC3063HS

■ **Test result**

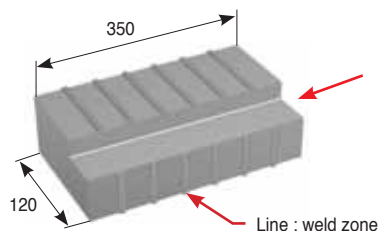



S INCONEL718

■ **Cutting condition** vc(m/min) = 60
fz(mm/t) = 0.1
ap(mm) = 2.5
wet

■ **Designation** INSERT SNMX1206ANN-MM
CUTTER RM8AC4080HR

■ **Test result**

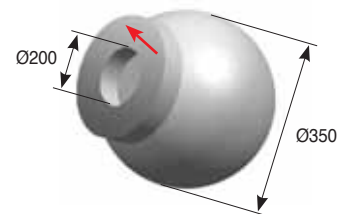


Uncoated Carbide Grades

Features

- ▶ Due to Korloys advanced sintering technology, our uncoated carbide grades have a fine alloy structure which is necessary to get superior quality from a uncoated cutting tool

[Microstructure]



P

Advantages

- ▶ Consist of P,M,K carbide grades and can be used in all kinds of workpiece
- ▶ Excellent quality at machining with coolant, due to the superior thermal crack resistance of the carbide
- ▶ Due to the special design of carbides, it has fine micro structure and low affinity with workpiece
- ▶ It has excellent toughness and produces lower cutting loads



K

Selection system

Workpiece	Grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	ST30A	130 (70 ~ 180)	P30	ST30A
K	Cast iron	H01, H05	K01	
		H10, G10	K10	H01, H05, G10
	Aluminum alloy	H01	K20	
	Copper alloys	H01	K30	

Main composition and application range

ISO	Composition	Features	Workpiece
P	WC-TiC-TaC-Co	Excellent thermal shock resistance and plastic deformation resistance	Carbon steel, Alloy steel, Stainless steel
M	WC-TiC-TaC-Co	General grades with thermal shock resistance and hardness	Carbon steel, Alloy steel, Stainless steel, Cast steel
K	WC-Co	High hardness and superior wear resistance	Cast iron, Non-ferrous metal, Non metal

The physical properties of grades

ISO	Grade	Hardness (H _v A)	TRS (kgf/mm ²)	Young's modulus (103kgf/mm ²)	Thermal expansion coefficient(10 ⁻⁶ /°C)	Thermal conductivity (cal/cm·sec·°C)
P	ST05	92.7	140	-	-	-
	ST10	92.1	175	48	6.2	25
	ST20	91.9	200	56	5.2	45
	ST30A	91.3	230	53	5.2	-
M	U10	92.4	170	47	-	-
	U20	91.1	210	-	-	88
	ST30A	91.3	230	53	5.2	-
	U40	89.2	270	-	-	-
K	H02	93.2	185	61	4.4	105
	H01	92.9	210	66	4.7	109
	G10	90.9	250	63	-	105

1kPa = 102kg/m², 1w/m·k = 2.39×10⁻³cal/cm·sec·°C



Milling Cermet Grades

- Features**
 - ▶ High hardness substrate ensures long tool life in high speed milling.
 - ▶ High toughness cutting edge ensures long tool life even in high impact machining.
 - ▶ Chemically stable substrate provides excellent surface finish of the workpiece.

- Application range**

Wide application range: carbon steel(from soft steel to high carbon steel), alloy steel, hardened steel(especially KP4M, NAK80), tool steel(STD61 and others)

Selection system

Workpiece	Machining types	Grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	CN2000	250 (200 ~ 300)	P10 ~ P20	
	Continuous cutting	CN20	180 (130 ~ 230)	P15 ~ P25	
	Interrupted cutting	CN30	150 (100 ~ 200)	P20 ~ P30	

The features of main cermet grades

Cermet Grade	ISO	Features
CN2000	P10 ~ P20	<ul style="list-style-type: none"> • Universal grade from finishing to roughing of steel • Functionally Gradient Material
CN20	P15 ~ P25	<ul style="list-style-type: none"> • For general turning and milling of steel • Universal cermet with wear resistance and toughness
CN30	P20 ~ P30	<ul style="list-style-type: none"> • For milling of steel • Cermet with high toughness

The physical properties of grades

ISO	Grade	Hardness(Hv)	TRS(kgf/mm ²)	SG(g·cm ⁻³)
P	CN2000	< 1800	210 <	6.8 ~ 7.0
	CN20	< 1600	220 <	6.7 ~ 7.0
	CN30	< 1500	240 <	7.0 ~ 7.3


Cutting performance

P STD11, NAK80, SM45C, KP4M

- Cutting condition**
 - vc(m/min) = 120~150
 - fz(mm/t) = 0.07~0.13
 - ap(mm) = 2.0
 - dry

- Designation**
 - INSERT SDCN42MT
 - CUTTER ADN4315R

- Test result**




P SM55C, KP4M

- Cutting condition**
 - vc(m/min) = 230
 - fz(mm/t) = 0.1~0.15
 - ap(mm) = 1.0
 - dry

- Designation**
 - INSERT SDCN42MT
 - CUTTER ADN4315R

- Test result**



Selection system

Workpiece	P Steel				M Stainless steel			K Cast iron			N Nonferrous			S HRSA			H Hardened		
	High speed	Medium speed	Low speed roughing	Interrupted heavy machining	High speed	Medium speed	Low speed roughing	High speed	Medium speed	Low speed roughing	High speed	Medium speed	Low speed	High speed	Medium speed	Low speed	High speed	Medium speed	Low speed
Coated Cemented Carbide	PC203F				PC210			PC203F			ND3000			PC210			PC203F		
	PC220				PC220			PC220			PD3000			PC210C					
Micro grain Cemented Carbide	FS1				FS1			FA2			H01								
	FA2				FCC			FA2			FA2								

Selection system

Workpiece	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	PC203F(H-Max)	130~260	P01	PC203F (H-Max)
			P10	
	PC220(I-Max)	80~150	P20	PC220 (I-Max)
			P30	
M Stainless steel	PC210	80~150	M10	PC210
			M20	
K Cast iron	PC203F(H-Max)	130~260	K01	PC203F (H-Max)
			K10	
	PC220(I-Max)	80~150	K20	PC220 (I-Max)
		K30		
S HRSA	PC210	50~100	S15	PC210
			S25	
N Nonferrous	ND3000(D-Max)	150~250	N01	ND3000(D-Max)
	PD3000	150~250	N10	PD3000
	PC210C(C-Max)	150~250	N20	PC210C(C-Max)



The features of PVD coated grades

PVD Coated grades	ISO	Features
PC203F (H-Max)	P01 ~ P10 K01 ~ K10	<ul style="list-style-type: none"> • Suitable for high speed cutting of steel • Combination of tough ultra fine grain substrate and PVD coating provide superior wear resistance and chipping resistance • New concept of coating equipped with high temperature oxidation resistance and high hardness
PC210	M10 ~ S20 S15 ~ S25	<ul style="list-style-type: none"> • Suitable for medium/low speed cutting of steel, stainless steel and super alloy • Ultra fine grain with coating provide superior tool life in high speed cutting
PC210C (C-Max)	N10 ~ N20	<ul style="list-style-type: none"> • Medium to high speed machining of copper • Excellent combination of chipping resistance substrate and K-Silver coating file having wear resistance, good lubrication
PC220 (I-Max)	P15 ~ P35 K15 ~ K35	<ul style="list-style-type: none"> • General cutting for steel • Combination ultra fine grain and hard coating provide wear resistance and chip welding resistance. • Superior new coating to better chipping resistance and wear resistance
ND3000	N01 ~ N10	<ul style="list-style-type: none"> • For electrode machining of graphite at medium to high speeds • Dia. coating layer with high wear resistance and lubrication
PD3000	N05 ~ N15	<ul style="list-style-type: none"> • For non-ferrous metals(Aluminum alloy) machining • DLC(Diamond Like Carbon) coating layer with high wear resistance and lubrication



Ultra fine grain cemented carbide

- Features**
 - ▶ Ultra fine grade has better toughness than general cemented carbide with same hardness. These properties allow it to replace High Speed Steel
 - ▶ This is achieved through a high oxidation temperature(1200°C) with high hardness, and provides superior performance for high speed cutting and dry cutting

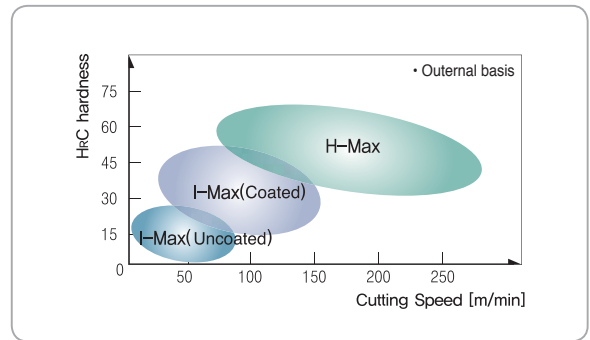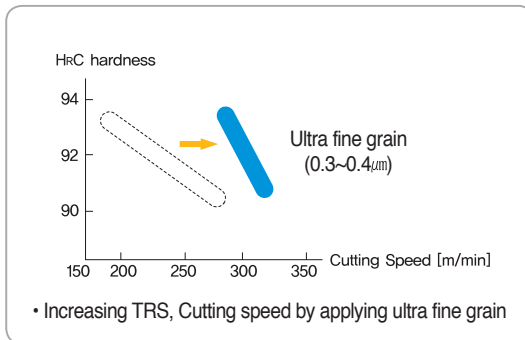

Features of Korloy endmills

Index	Features
H-Max (for high speed, high hardened steel)	<ul style="list-style-type: none"> • New design for hardened steel cutting (over HRC53). Special sphere tool geometry provides increased tool life and allows higher speeds and feed operations • Combination TiAlN hard coating with suitable substrate increases tool life
I-Max (Coated, General machining)	<ul style="list-style-type: none"> • Superior wear resistance and chipping resistance by applying ultra fine grain and Korloy's exclusive PVD layer • Available for various machining from roughing to finishing
I-Max (Carbide endmills)	<ul style="list-style-type: none"> • Suitable for all milling types such as jig and molding with various designation • Multi purpose machining possible(shouldering, slotting)
Hard to cut machining, stainless steel	<ul style="list-style-type: none"> • Sharp cutting edge and high rake angle with streamline chip pocket shows good cutting performance in stainless steel machining where work hardening is a problem.
Carbide endmills for aluminum alloy (SSEA, SSBEA)	<ul style="list-style-type: none"> • Suitable for high speed machining in aluminum and other non-ferrous materials • Can accomplish excellent surface finishing, superior chip removal in high feed rate
Micro endmills (MSE/MSBE)	<ul style="list-style-type: none"> • Small size endmills, for various micro machining, has been strengthened in the neck for protection against fracture at high speeds
C-Max	<ul style="list-style-type: none"> • Excellent combination of chipping resistant substrate and CrN coating film having wear resistance and chipping resistance
D-Max	<ul style="list-style-type: none"> • Optimum coated property with fine diamond particle in nonferrous metal machining as graphi increasing tool life and good surface roughness through improved edge geometry • Available to cutting application in intermittent cutting condition and high precision machining as well



Selection system

Workpiece	Steel				M Stainless steel			K Cast iron			N Nonferrous			S HRSA			H Hardened		
	High speed	Medium speed	Low speed roughing	Interrupted heavy machining	High speed	Medium speed	Low speed roughing	High speed	Medium speed	Low speed roughing	High speed	Medium speed	Low speed	High speed	Medium speed	Low speed	High speed	Medium speed	Low speed
Coated Cemented Carbide	PC205F				PC205F			PC205F			PC205F			PC205F			PC205F		
Micro grain Cemented Carbide	FG2				FG2			FG2			FG2			FG2			FG2		

Selection system

Workpiece		Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P	Steel	PC205F	130~250	P01	
				P10	
				P20	
				P30	
M	Stainless steel	PC205F	80~180	M01	
				M10	
				M20	
				M30	
K	Cast iron	PC205F	130~250	K01	
				K10	
				K20	
				K30	
S	HRSA	PC205F	80~130	S01	
				S10	
				S20	
				S30	


The features of PVD coated grades

PVD Coated grades	ISO	Features
PC205F	P15 ~ P30 M15 ~ M30 K15 ~ K30 S15 ~ S25	<ul style="list-style-type: none"> Solid drill(under Ø20) for steel, stainless steel and super alloy Superior wear resistance and chipping resistance with ultra fine grain




Diamond Coated Grades

- Features**
 - ▶ Increased tool life of up to 150% due to Korloy Nano technology
 - ▶ The nano-size (~100nm) of diamond particles decreases the friction coefficient. Less friction leads to better chip flow
 - ▶ Due to the minimized built-up on the cutting edge, machined surfaces retain a better finish



ND1000/ND2000 coating structure



Cutting Performance of ND2000

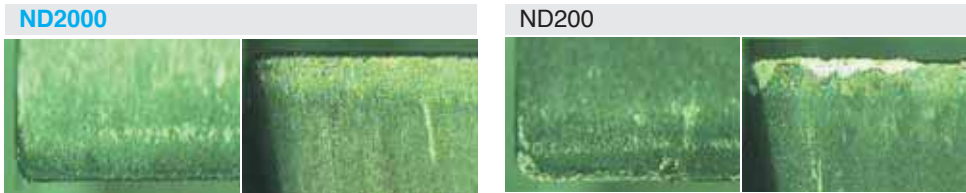

(APKT1604PDFR-MA, AMS3063S)

- Cutting length : 10m
- Workpiece : AC8A
- Speed(vc) : 950m/min
- Depth of cut(ap) : 5mm
- Feed(fz) : 0.15mm/t
- Coolant : Dry

Application range

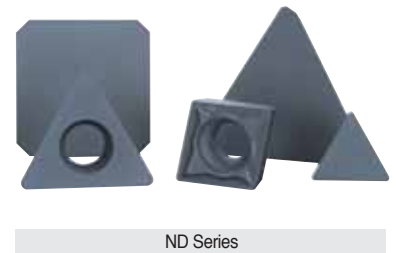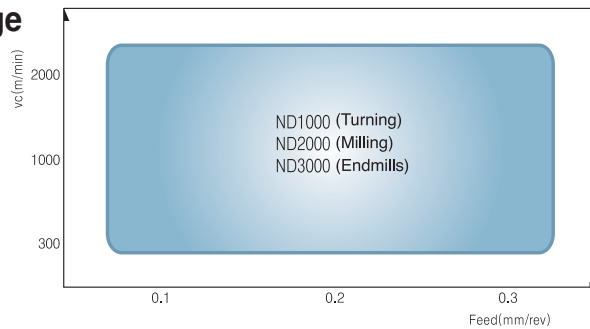

Available Products

- AR Chip breaker
- AK Chip breaker
- Insert for Aluminum machining

DLC Coated Grades

- Features**
 - ▶ Hardness of film is up to Hv 7000, tool life is 3~6times of cemented carbide cutting tool
 - ▶ Good surface finish can be acquired due to the lubrication effect that led from low friction coefficient (<0.1)
 - ▶ Suitable for non-ferrous material machining



Cross-sectional view of DLC

- Application**
 - ▶ For aluminum, carbon, plastic, wood / Insert, drill, endmill


Cutting performance

(Built-up edge / surface finish, FMACM3100R)

View Grade	Top face	Major cutting edge	Surface finish of workpiece
Uncoated			
DLC			

- Workpiece : AC2B
- Cutting length : 12m • Cutting condition : vc=1500m/min, fz=0.15mm/t, ap=2mm, Dry

Application range

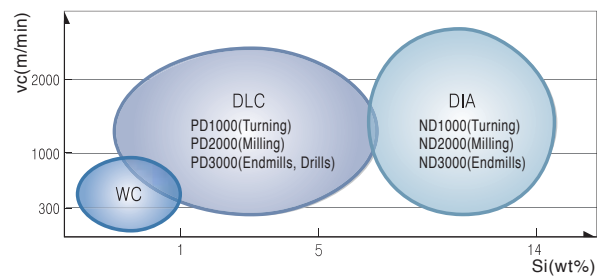

Leader of DLC coated cutting tool for aluminum machining




Brand new cBN insert


Coated Multi-Cornered cBN

DNC250


- Stable and long tool life
- Cost effective by multi-cornered one-use insert




- Black Position : cBN
- White Position : paste




- New technology K-Gold PVD Coated
- Lubricant film
- Enhance wear Resistance

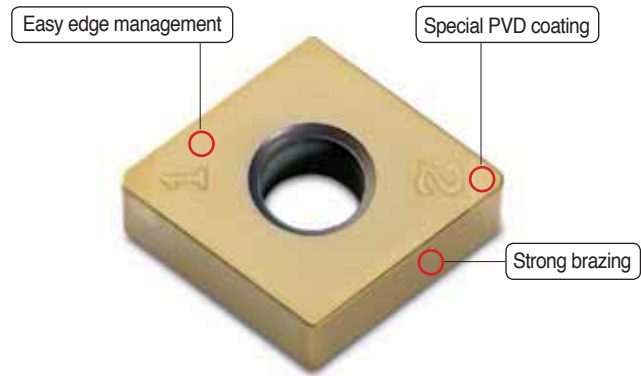


Application range

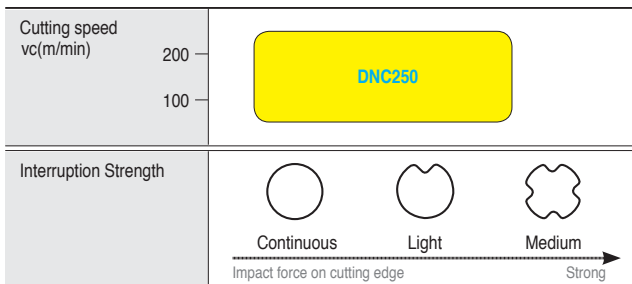

Recommended Cutting Condition

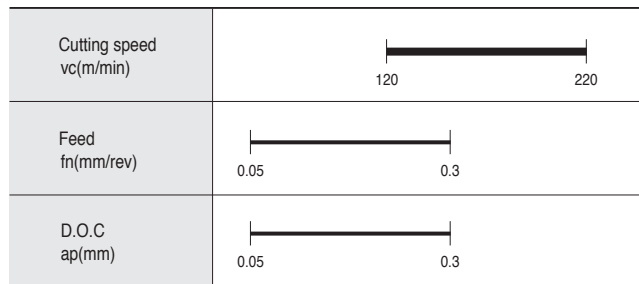


Application Example



- **Cutting condition** : vc(m/min)=90
fn(mm/rev)=0.15
ap(mm)=0.15
wet
Light interruption cutting
- **Workpiece** : Gear, SCM415(HrC58~60)
- **Insert** : 2NU-CNGA120408

Cutting performance Continuous







- **Cutting condition** : vc(m/min)=90
fn(mm/rev)=0.15
ap(mm)=0.15
wet
Light interruption cutting
- **Workpiece** : Gear, SCM415(HRC58~60)
- **Insert** : 2NU-CNGA120408

Features of cBN Grade

Type	Grade	Applications	Features
Uncoated	KB410	High speed continuous cutting of hardened steel	Best wear resistance grade and suitable for high speed continuous cutting
	KB420	High efficiency cutting of hardened steel	Binder with high heat resistance improve tool life during high speed machining
	KB425	High speed interrupted cutting of hardened steel	Superior fracture resistance and suitable for high speed interrupted hard turning
	KB320	Continuous cutting and interrupted cutting of hardened steel	Micro grain cBN with ceramic binder improve fracture resistance and wear resistance
	KB210	High speed continuous and interrupted cutting of hardened steel	Superior fracture resistance for high interrupted hard turning
	KB335	Interrupted cutting of hardened steel	Micro grain cBN with higher fracture resistance and wear resistance
	KB350	High speed precision machining of cast iron (GC/GCD)	High fracture resistance and wear resistance
Coated	KB370	High speed machining of cast iron and Exotic alloys	The highest hardness and toughness acquire good performance for difficult-to-cut material and cast iron
	DNC250	High efficiency and interrupted cutting of hardened steel	Excellent wear resistance, Cost effective by multi-cornered one-use insert



☉ Type of cBN insert



Regrinding type	One use type	Multi edge type	cBN Coated Multi-Cornered cBN
<ul style="list-style-type: none"> Long tool life Excellent wear resistance, High hardness Saved tool cost due to the regrinding insert 3~4 time  <p>CNMA120408</p>	<ul style="list-style-type: none"> Economical price Cost down Simple tool management Various line-up Stable machining and long tool life due to strong brazing technology  <p>NUCNMA120408</p>	<ul style="list-style-type: none"> Insert with several brazed cBN Price per edge is more reasonable compare to normal single cornered, one-used type Wide application of continuous to interrupted machining  <p>2NUNCNGA120408</p>	<ul style="list-style-type: none"> Easy Edge Management Specail PVD Coating Strong Brazing 

☉ For general hardened steel machining

• Recommended cutting condition

Grade	Cutting Speed, vc(m/min)	Feed fn(mm/rev)				D.O.C ap(mm)					
		0	0.1	0.2	0.3	0	0.1	0.2	0.3	0.4	0.5
KB410	150 — 200	0.03	0.03	0.03	0.13	0.03	0.03	0.03	0.03	0.2	0.2
KB420	120 — 150	0.03	0.03	0.03	0.3	0.03	0.03	0.03	0.03	0.5	0.5
KB425	150 — 200	0.03	0.03	0.03	0.3	0.03	0.03	0.03	0.03	0.5	0.5
KB320	80 — 120	0.03	0.03	0.03	0.2	0.03	0.03	0.03	0.03	0.3	0.3
KB210	150 — 200	0.03	0.03	0.03	0.2	0.03	0.03	0.03	0.03	0.3	0.3
KB335	80 — 110	0.03	0.03	0.03	0.2	0.03	0.03	0.03	0.03	0.3	0.3
DNC250	120 — 220	0.05	0.05	0.05	0.3	0.05	0.05	0.05	0.05	0.3	0.3


• Application range

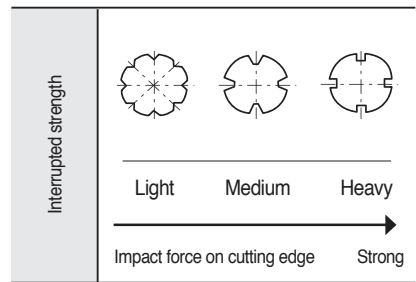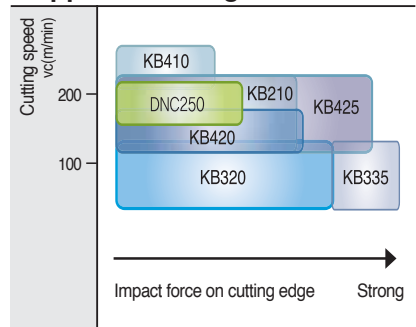

☉ For valve seat ring (VSR)

Division	Gasoline VSR material	Diesel VSR material
Plunge machining	KB370, KB330	KB370, KB330
Traverse machining	KB370, KB350	KB370, KB350
Hardness(HV)	Low ← HV300 → High	Low ← HV300 → High

☉ For sintered component machining


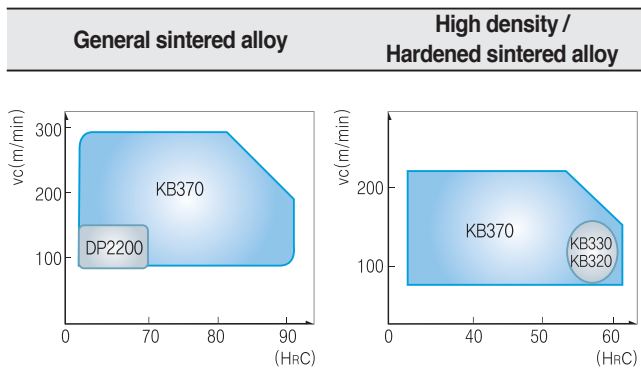


cBN for cast iron

• Recommended cutting condition

division	Workpiece		Cutting speed, vc(m/min)			fn (mm/rev)	ap (mm)
	Material	Grade	100	1000	2000		
Turning	Gray cast iron	KB370	500 ————— 2000			0.1~0.5	≤ 1.0
		KB350	200 ————— 700			0.1~0.5	≤ 1.0
	Alloyed cast iron	KB370	200 ————— 800			0.1~0.4	≤ 0.5
	Ductile cast iron	KB370	80 ————— 200			0.1~0.4	≤ 0.6
		KB350	100 ————— 350			0.1~0.4	≤ 0.5
		KB410	250 ————— 500			0.1~0.4	≤ 0.5
Milling	Gray cast iron	KB370	800 ————— 2000			0.1~0.5	≤ 0.5

• Application range



Technical information for PCD insert

Features KORLOY PCD products are manufactured by using high quality PCD tips under ultra high temperatures and pressure. The PCD tip is welded on the qualified KORLOY carbide insert
KORLOY high quality PCD products meet a wide range of application needs in turning, milling, and endmills.

- ▶ Excellent tool life for aluminum alloy and copper alloy
- ▶ Excellent tool life for Ceramic, high-Si aluminum and rock or stone
- ▶ Excellent tool life for rubber, carbon, graphite and wood

PCD Grade


Grade	Features	Application	Grain size(μm)	Hardness(Hv)	TRS(kgf/mm ²)
DP90	Coarse diamond grain has been used to get excellent wear resistance enough to machine cemented-carbide, high Si aluminum alloy	Cemented carbide Ceramic roughing High Si aluminum alloy Rock, Stone	50	10,000~12,000	110
DP150	By use of fine diamond grain having good bonding property, it is suitable for machining of non-ferrous metal, graphite	High Si aluminum alloy Copper, Bronze alloy Rubber, Wood, Carbon	5	10,000~12,000	200
DP200	By use of ultra fine diamond grain, it is possible to make sharp cutting edge. Thus it is appropriate grade to machine non-ferrous material	Plastic Wood Precise finishing of aluminum	0.5	8,000~10,000	220

Recommended cutting condition


Workpiece	Cutting speed (m/min)	Feed (mm/rev)	Depth of cut (mm)	Recommended grade	
				1st	2nd
Aluminum alloy (4%~8% Si)	1000 ~ 3000	0.1 ~ 0.6	~ 3	DP150	DP200
Aluminum alloy (9%~14% Si)	600 ~ 2500	0.1 ~ 0.5	~ 3	DP150	DP200
Aluminum alloy (15%~18% Si)	300 ~ 700	0.1 ~ 0.4	~ 3	DP150	DP200
Copper, Bronze alloy	~ 1000	0.05 ~ 0.2	~ 3	DP150	DP200
Reinforced plastic	~ 1000	0.1 ~ 0.3	~ 2	DP150	DP200
Wood	~ 4000	0.1 ~ 0.4	-	DP150	DP200
Cemented carbide	10 ~ 30	~ 0.2	~ 0.5	DP90	DP150

Cutting performance


Continuous cutting test(Workpiece:Al-25%Si)

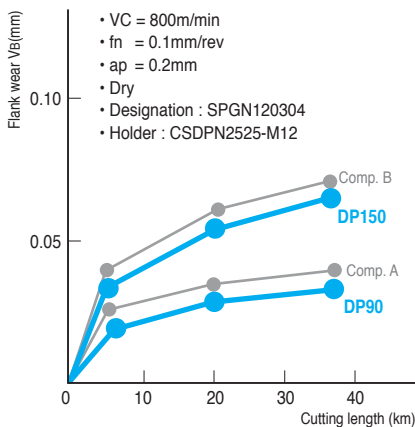




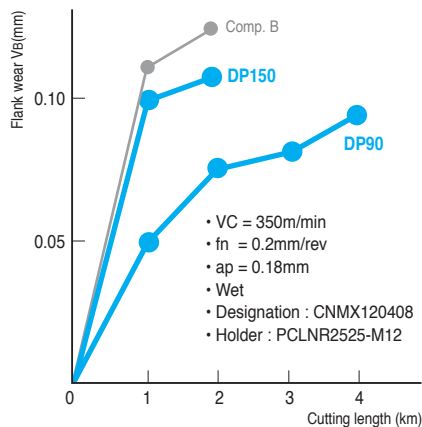






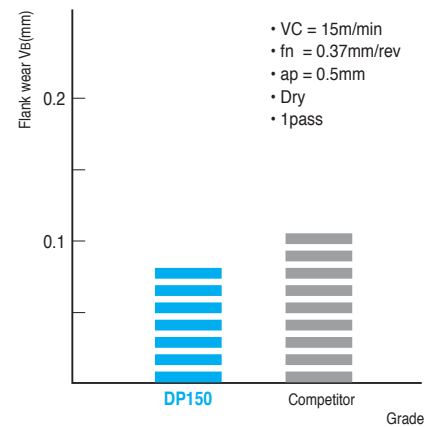



















Interrupted cutting test(Workpiece:Al-20%Si)



Cutting test of cemented carbide



KORLOY Chip Breaker For Turning



































Geometry	Cutting edge	Application range													Features
		feed rate (mm/rev)													
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3		
depth of cut (mm)															
		0.1	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	11.6	13	
V Series	VG						0.1~0.35			0.5~2.5					For finishing <ul style="list-style-type: none"> Ensures stable chip flow even at very small depth of cut Suitable for copying
	VQ						0.1~0.4			1.0~3.0					For Medium to Finish Cutting <ul style="list-style-type: none"> Strong cutting edge makes excellent cutting performance at interrupted cutting
	VL						0.1~0.35			0.2~1.5					For Finishing <ul style="list-style-type: none"> Stable chip control in high toughness material; low carbon steel, pipe steel & steel plates Improved chip control for facing, copy machining and better surface finish
	VF						0.05~0.35			0.5~1.5					For Finishing <ul style="list-style-type: none"> Good chip control quality on varied depth of cut Excellent cutting edge strength has been acquired due to the special chip-breaker
	VB						0.15~0.45			0.5~2.0					For Finishing <ul style="list-style-type: none"> Improved chip control for smaller depth of cuts Excellent chip control in copying, corner R machining
	VC						0.12~0.45			0.5~3.5					For Medium to Finish Cutting <ul style="list-style-type: none"> Stable chip control in copying and internal machining with various depths of cut
	VM						0.1~0.5			1.0~5.0					For Medium cutting <ul style="list-style-type: none"> Wide available chip control range from medium-finishing to medium-roughing Suitable chip breaker for CNC machining
	VK						0.15~0.5			1.0~5.0					For Medium to Roughing of Milling <ul style="list-style-type: none"> Optimal for high speed machining and interrupted machining
	VH									0.7~1.4			6.0~15.0		For Heavy duty cutting <ul style="list-style-type: none"> Designed specifically for heavy machining Specialized chip breaker for the heavy industries like Ship building, Power plant industry
	VT									0.75~1.6			7.0~17.0		For Heavy duty cutting <ul style="list-style-type: none"> Designed specifically for heavy machining Specialized chip breaker for the heavy industries like Ship building, Power plant industry
	VP1						0.05~0.20			0.10~1.5					For Finishing <ul style="list-style-type: none"> High positive cutting edge Reduced chip contract minimizes temperature to improve tool life
	VP2						0.05~0.40			0.50~4.0					For Medium to Finish Cutting <ul style="list-style-type: none"> Stable chip control and high machinability in copying with various depths of cut
	VP3						0.05~0.45			0.50~4.5					For Medium cutting <ul style="list-style-type: none"> High positive cutting edge with wide land Stable cutting performance in interrupted machining with high toughness Stable machinability and chip control in machining with high depth of cut
H Series	HR						0.25~0.65			2.5~7.0				For Roughing <ul style="list-style-type: none"> Excellent chip control at deep depth of cut and fast feed rate Strong cutting edge makes excellent cutting performance at intermittent cutting 	
	HA						0.03~0.3			0.5~2.5				For Light-alloy, Stainless-steel machining <ul style="list-style-type: none"> Sharp cutting edge generates low cutting force Specially designed tough main cutting edge Suitable for cutting of low carbon steel, stainless steel, aluminum 	

Notice : Application ranges are based on main cutting material



Grades & Chip Breakers





KORLOY Chip Breaker For Turning

Geometry	Cutting edge	Application range											Features											
		feed rate (mm/rev)																						
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0		6.3										
depth of cut (mm)																								
											0.1	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	11.6	13	
H Series	HS									0.1~0.4														For Medium cutting of Stainless steel <ul style="list-style-type: none"> • Exclusive design for stainless steel cutting provide longer tool life • Wear resistance have been reinforced through high rake angle of chip breaker land
G Series	GM									0.1~0.5														For Medium to Light cutting <ul style="list-style-type: none"> • Excellent chip control at general cutting conditions • Strong cutting edge strength provides good performance at intermittent and fast feed cutting
	GR																							For Medium to Roughing <ul style="list-style-type: none"> • Suitable for deep depth of cut and high feed cutting of steel and cast iron • Suitable for intermittent cutting
	GH																							For Heavy duty cutting <ul style="list-style-type: none"> • Suitable for heavy duty cutting due to strong cutting edge • Wide chip control range with low cutting force
	GS																							For Medium to Roughing of Stainless-steel <ul style="list-style-type: none"> • Exclusive chip breaker for stainless steel
	B Series	B25																						For General cutting <ul style="list-style-type: none"> • Suitable for general cutting condition cutting
V-post Series	VF																						For Finishing <ul style="list-style-type: none"> • Improved surface finish and size accuracy due to stable inner boring 	
	VL																						For Finishing <ul style="list-style-type: none"> • Superior chip control in low carbon steel, pipes, and steel plates 	
	VP1																						For Finishing <ul style="list-style-type: none"> • Excellent chip control in application with micro depth of cut and low feed • Low cutting load and superb surface finish • Optimal for both internal and external machining 	
H-post Series	HMP																						For Medium cutting <ul style="list-style-type: none"> • Excellent chip control at wide range of cutting conditions • Suitable for stainless steel cutting 	
C Series	C25																						For Medium cutting <ul style="list-style-type: none"> • Suitable for interrupted cutting and cast iron machining • Good surface finish due to low cutting force • Suitable for both boring and outer diameter turning 	
AL Series	AK																						For Aluminum cutting <ul style="list-style-type: none"> • High rake angle and low resistance cutting edge secures long tool life in continuous cutting of aluminum turning • High speed of finishing operation 	
	AR																						For Aluminum cutting <ul style="list-style-type: none"> • High stability of cutting edge secures great performance in high speed and interrupted machining • High speed of medium and interrupted operation 	
Auto tool Series	KF																						For Finishing <ul style="list-style-type: none"> • Shallow depth of cut with sharp edge. • Longer tool life at high speed cutting due to low cutting force • Good surface finish 	
	KM																						For Medium to Finish Cutting <ul style="list-style-type: none"> • Improved chip control makes tool life long and better machining 	
Wiper tool Series	LW																						For Medium cutting(Wiper) <ul style="list-style-type: none"> • Guarantees excellent surface roughness and good chip controls at high feed machining 	
	VW																						For Finishing(Wiper) <ul style="list-style-type: none"> • Improved surface roughness at shallow depth of cut and high feed due to strong cutting edge 	




Notice : Application ranges are based on main cutting material



KORLOY Chip Breaker For Milling

Geometry	Cutting edge	Application range												Features
		feed rate (mm/t)												
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	
depth of cut (mm)														
0.1	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	11.6	13		
Alpha Mill Series	MA 	0.1~0.4				0.5~16								For Aluminum <ul style="list-style-type: none"> Sharp cutting edge and buffed top face show excellent chip flow and welding resistance in aluminum machining
	MF 	0.05~0.15				0.5~16								For Finishing of Milling <ul style="list-style-type: none"> Low cutting force chip breaker design ensures longer tool life and excellent machining in difficult-to-cut material and light machining
	MM 	0.1~0.25				0.5~16								For Medium to Roughing of Milling <ul style="list-style-type: none"> Suitable geometry design for general milling has wider ranges of machining
	ML 	0.05~0.15				0.5~16								For hard-to-cut material machining <ul style="list-style-type: none"> The chip breaker with low cutting resistance ensures superior machinability in hard-to-cut materials

KORLOY Chip Breaker For Drilling

Geometry	Cutting edge	Application range												Features
		feed rate (mm/rev)												
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	
depth of cut (mm)														
30	60	90	120	150	180	210	240	270	300	330	900			
King-Drill Series	PD 	0.04~0.20				60~300								For general steel machining <ul style="list-style-type: none"> Chip breaker with strong cutting edge for universal applications with steel, stainless steel, and cast iron
	ND 	0.04~0.10				100~400								Non-ferrous metals <ul style="list-style-type: none"> Chip breaker with sharp and polished cutting edge for aluminum and non-ferrous metals. Machining with King Drill ensures good chip flow and resistance to chip welding.
	LD 	0.04~0.15				40~250								For general steel (mild steel and forged steel) <ul style="list-style-type: none"> Superior chip control in machining of mild steel, forged steel and stainless steel

Notice : Application ranges are based on main cutting material

