


J

TOOLING EXAMPLES

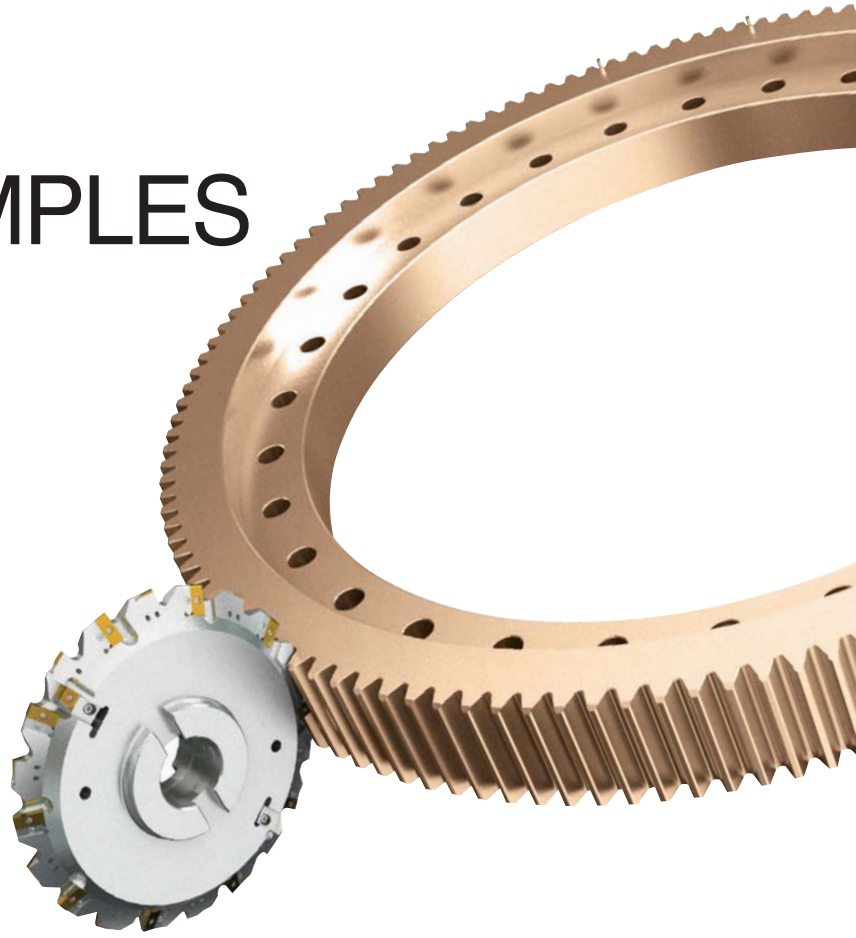

TOOLING EXAMPLES

C O N T E N T S

Industrial Tooling Example

- J02** Gear Machining Solution
- J04** Ship Building Industrial Solution
- J07** Role Machining Solution
- J08** Railway Industrial Solution
- J10** Pipe Industrial Solution
- J12** Bearing working Solution
- J13** Development Industrial Solution
- J14** Aviation Industrial Solution
- J18** Slitter Knife
- J19** The Inserts For Pulley working

Tooling Example For Auto Industry

- J20** Knuckle
- J22** Brake
- J24** Connecting Rod
- J26** Block
- J28** Head
- J30** Crankshaft

Gear machining (External Gear)

🎯 Cutter For Roughing



- Cutter diameter : Ø300
- The Number of Edges : 60
- Available for High Speed working through onrolled V-Style edges to reduce Cutting Force

🎯 Cutter For Medium



- Cutter diameter : Ø280
- The Number of Edges : 48
- Available for High Efficiency and Long Life and high productivity through Korloy's own insert shape
- Made R part of gear by proper designed 'R'-shape of insert

🎯 Cutter For Finishing: M20




- Cutter diameter : Ø400
- The Number of Edges : 20
- Gear cutter for Medium is realized on the 4 grade of precision.(KS, JS)
- Chamfering system available for machining efficiency

🎯 Hob Cutter



- Cutter diameter : Ø350
- The Number of Edges : 100
- Indexable Hob for roughing worked by generating cutting action
- Available for customized producing by user

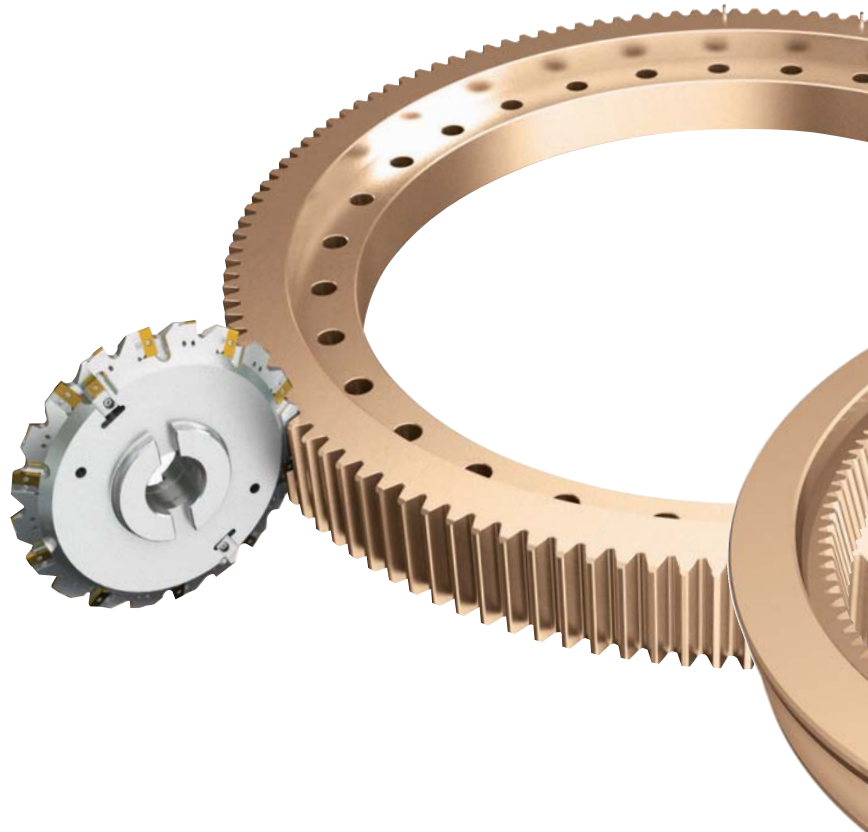

🎯 KING DRILL



Optimal indexable drill design

- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
- Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
- Grade : PC3500, PC5300

🎯 VH Chipbreaker



- Innovative improved chip breaking on the medium working
- Provided good performance on the flange and continuous working
- Type of SNMM / CNMM

🎯 TPD



High precision and high efficiency indexable drill

- Highly efficient drilling in high speed and high feed machining
- Excellent surface roughness

🎯 VT Chipbreaker



- Excellent rigidity on the high feed and depth
- Excellent impact resistance and long life based on stable structure and outstanding rigidity
- Type of SNMM / CNMM

Maquinado de Engranés (interno)

Cutter for Roughing



- Cutter diameter : Ø560
- The Number of Edges : 140
- Available for all module gear working is caused by edges designed stair shape



Cutter for Medium



- Cutter diameter : Ø400
- The Number of Edges : 48
- Available for making involute curve shape of internal gear




Cutter for Finishing



- Cutter diameter : Ø400
- The Number of Edges : 20
- Cutter for finishing available for 4 grades accuracy of internal gear
- Available for chamfering on the same time and unnecessariness of extra working



KING DRILL



Optimal indexable drill design

- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
- Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
- Grade : PC3500, PC5300

TPD



High precision and high efficiency indexable drill

- Highly efficient drilling in high speed and high feed machining
- Excellent surface roughness



Ship building (Engine block)

⊙ Roughing cutter for cylinder block



- Cutter diameter: $\text{Ø}200$
- Applicable insert: SNCF1507ANN-MF
- Economical concepts: 8 edge available insert, high feed available tool
- KORLOY exclusive latch clamping system provides quick change of insert


⊙ TPD



High precision and high efficiency indexable drill


- Highly efficient drilling in high speed and high feed machining
- Excellent surface roughness

⊙ KING DRILL



Optimal indexable drill design


- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
- Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
- Grade : PC3500, PC5300

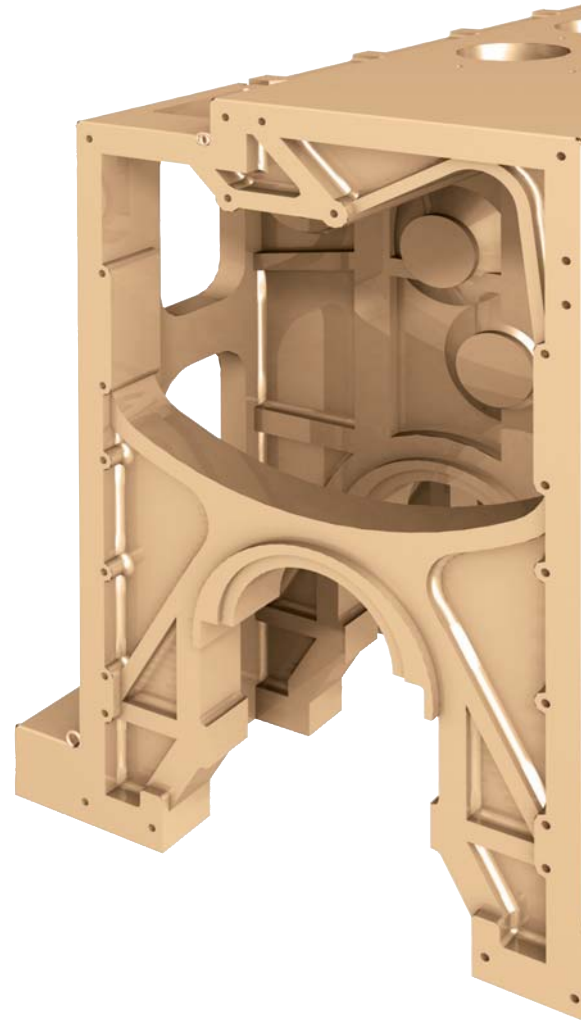

⊙ Cylinder block cam shaft boring cutter (Aluminum body cutter)



- Cutter diameter : $\text{Ø}270$
- Applicable insert : LNE434 / SDKX1506
- Right-hand rotational aluminum cutter body, easy to handle, makes high precision boring

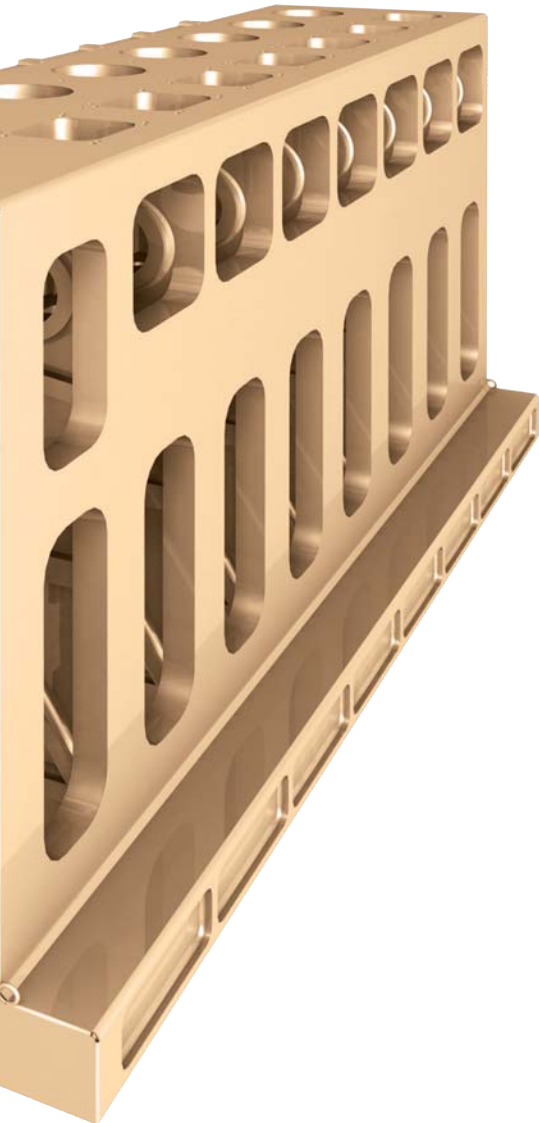

🎯 Cylinder block roughing and medium (BOTH)




- Cutter diameter: $\varnothing 200$
- Applicable insert: LNE434 / LNCS1907-R3.0-WC
- Designs available for roughing and medium applications
- Available high efficiency working to chose LNE 434 insert for roughing and high reliability grade
- Good surface working through LNCS1907-R3.0-WC Wiper shape for medium

🎯 High rake-angle applied cylinder block roughing cutter



- Cutter diameter : $\varnothing 250$
- Applicable insert : SECN2606AFN
- High rake angle cutter suitable for the machining applications that have the tendency to create chatter

🎯 Adjustable medium machining cutter

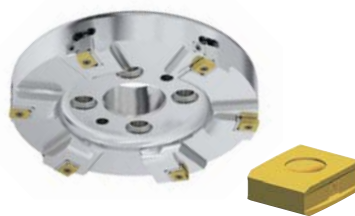

- Cutter diameter : $\varnothing 250$
- Applicable insert : LNCS1907-C1.5-WC
- Cutting edge height adjustable device provides excellent surface finish


🎯 Cylinder block bearing cap seat machining cutter



- Cutter diameter: $\varnothing 250$
- Applicable insert: RDKT2006M0
- Several sizes of inserts are prepared to meet the radius requirement of work-piece
- Rigid inserts for high efficiency machining




Ship building (Crank shaft / Propeller)

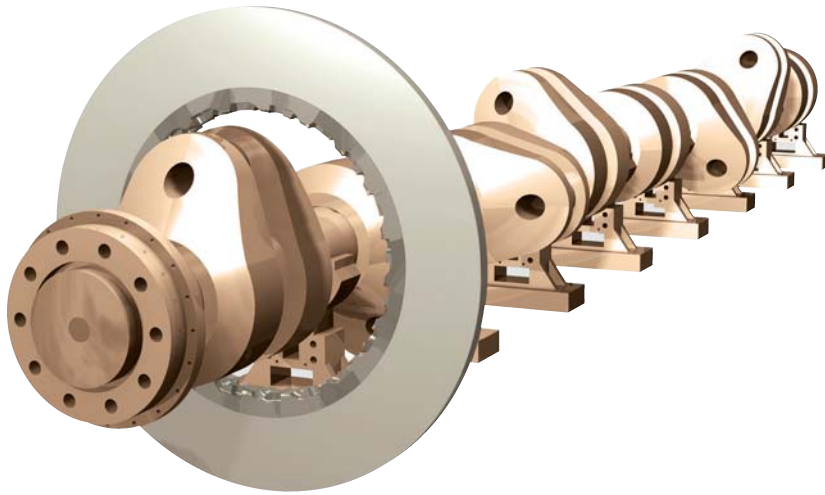

🎯 KORLOY exclusive screw-on type internal pin miller




- Cutter diameter : Over $\text{Ø}2000$
- Weight : 1.5 tons
- Pin miller for crank shaft of medium size ship engine
- Special segment assembly system developed by KORLOY makes it easy to handle and provides excellent cutting performance with good chip forming

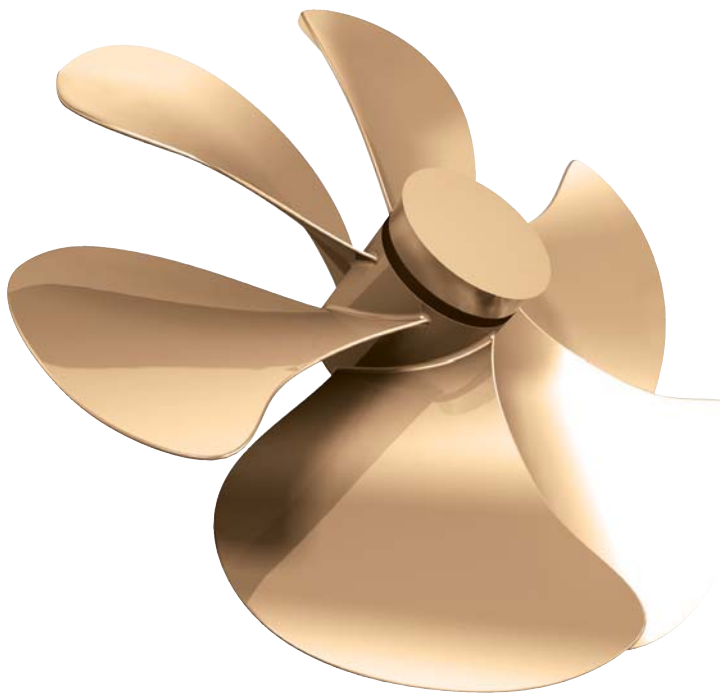


🎯 Periphery side of propeller machining tool



- Cutter diameter : $\text{Ø}150$
- Applicable insert : CDEW170708R
- Positive relief angle applied to get smooth cutting without chatter



🎯 Top face of propeller machining tool



- Cutter diameter : $\text{Ø}250$
- Applicable insert: SECN1904EER
- Double layer insert array provides big depth of cut



Role machining (Body / Shape / Parting-off)

Role machining (Body / Shape / Parting-off)




Closer chip breaker to the cutting edge provides better chip control even in deep grooving

- Good chip evacuation even in deep grooving
- High hardness coating grade that has excellent wear resistance prevents damage from cutting load. (Photo shows edge damage after machining same time under same conditions)

Parting-off Roll

- Unique insert geometry for better chip control even in deep grooving
- High hardness coating grade provides excellent wear resistance

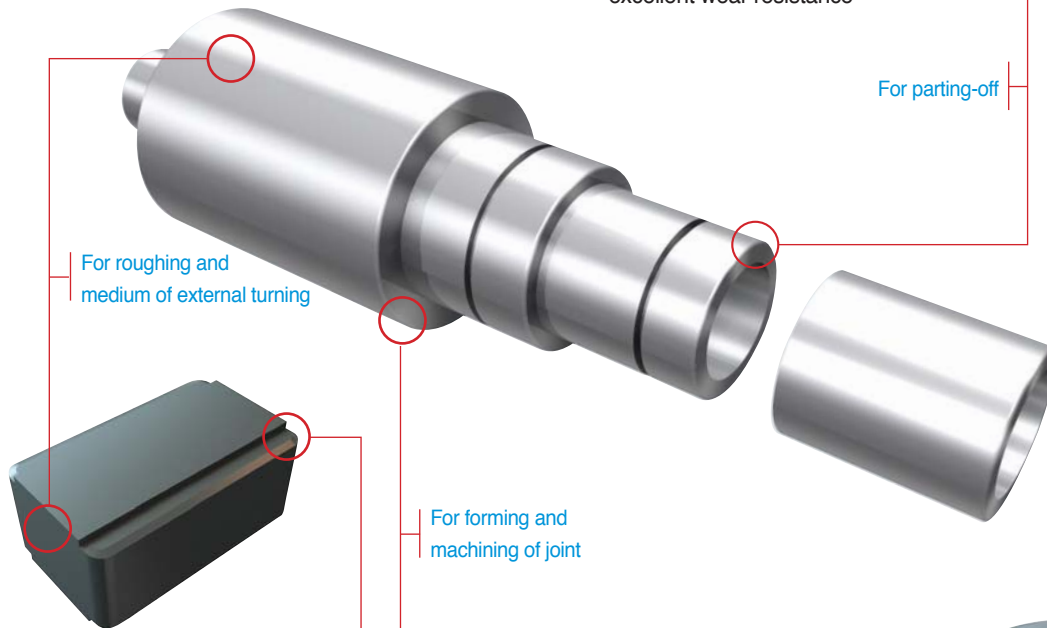

For roughing and medium of external turning

For forming and machining of joint



For parting-off

External turning of Roll

- Match of high hardness coating grade (NC6110) with chip breaker provides longer tool life with smooth chip control
- Various cutting edge designs are applicable according to workpiece materials and cutting conditions

Application case

The combination of high hardness coating grade (NC6110) and chip breaker shows better performance



- Equipped with wide chip breaker enough to prevent crater wear
- Better chip control from the beginning of the machining, together with high hardness coating grade provides 3 times longer tool life than conventional tool. (especially at finishing)

Forming and grooving of Roll

- Special chip breaker focus on suitable chip forming (engineered chip breaker width and depth)
- Strong cutting edge treatment prevents un-expected fracture of insert





Railway Industry (Separator / Crossing / Rail)


🎯 Rail separator joint face milling cutter




- Cutter diameter : $\varnothing 160$
- The Number of Edges : 54
- Special customizing is available upon customer's requests

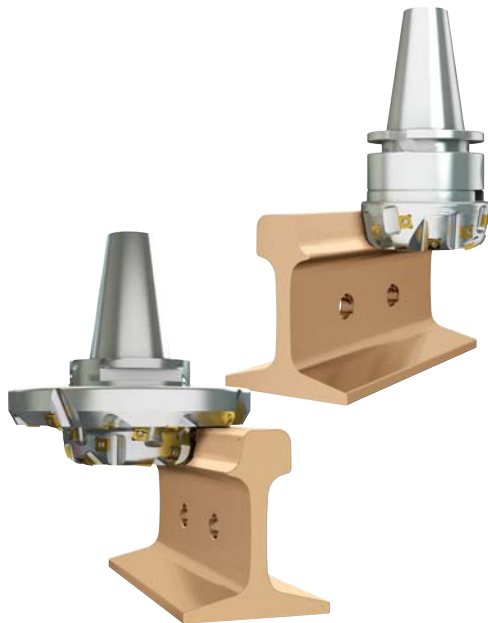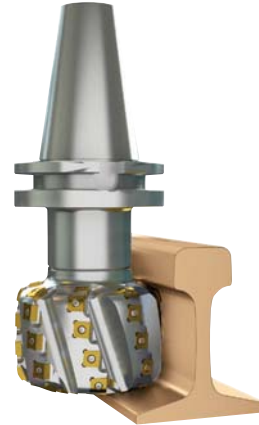

🎯 Cutter for top of guard-rail working



- Cutter diameter : $\varnothing 160$
- The Number of Edges : 16
- Precise forming of rail way is possible



- Cutter diameter : $\varnothing 300$
- The Number of Edges : 33
- One body design of cutter and arbor provides high rigidity

🎯 Taper milling for top of guard-rail working




- Cutter diameter : $\varnothing 200$
- The Number of Edges : 24
- Economical 8 edge available insert
- Special customizing is available upon customer's requests



🎯 Periphery face milling for the top side of rail way



- Cutter diameter : $\varnothing 240$
- The Number of Edges : 25



🎯 Cutter for repairing rail





- Cutter diameter : $\varnothing 600$
- The Number of Edges : 198
- Milling applicable on the rail of part requested repairing


Rail Industry (wheel)

🎯 The type of LNUX for the working of wheel (Repair)

- Material : SSW2. Ø920~1000
- Cutting conditions : $vc=78\text{m/min}$ (13~18min-1) $fn=1.0\text{mm/rev}$ $ap=3\sim4\text{mm}$
- Insert : LNUX301940-TM Grade : NC3220
- Result : good chip evacuation, stable structure and long life tool life

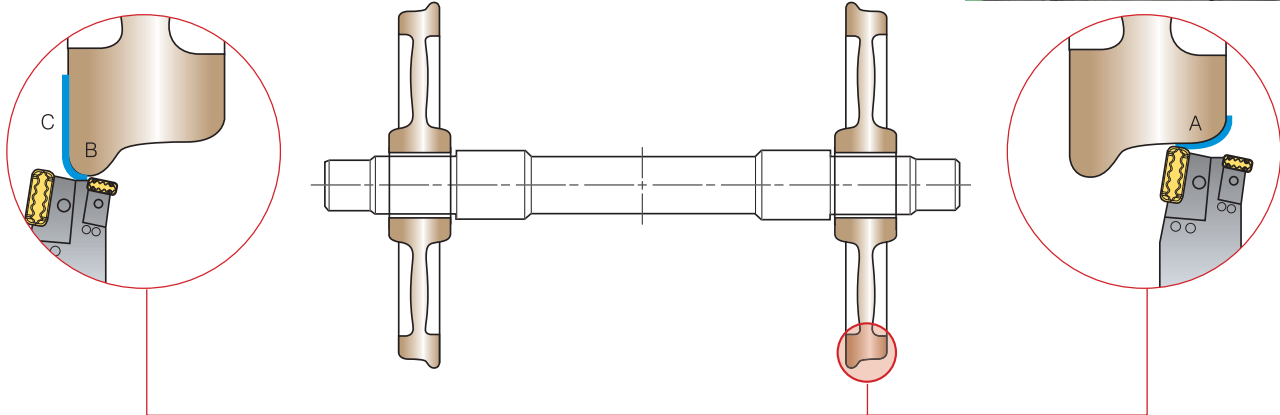


LNUX301940-TF
 <ul style="list-style-type: none"> • For light cutting, it generates a low load with good chips


LNUX301940-TM
 <ul style="list-style-type: none"> • Comprehensive design for general use, strong cutting edge with good chip forming (First recommendation)



Working procedure	A	B	C
Insert	LNUX301940-TF/TM	LNUX191940-25/22	
Grade	NC3220	NC3220	
Cutting condition	Decrease the speed on deep part of A	Increase the speed to get good chip evacuation	

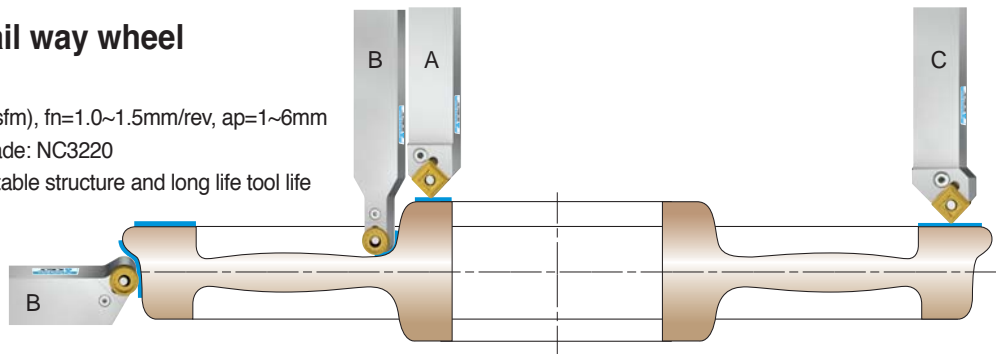

🎯 RCMX insert for rail way wheel




- Material: SSW2. Ø840
- Cutting conditions: $vc=55\sim100(\text{sfm})$, $fn=1.0\sim1.5\text{mm/rev}$, $ap=1\sim6\text{mm}$
- Insert: RCMX3209M0-SL Grade: NC3220
- Result: good chip evacuation, stable structure and long life tool life



VT chip breaker
 <ul style="list-style-type: none"> • Strong cutting edge for high feed and deep cutting depth • Tough design of chip breaker provides excellent impact resistance • SNMM type

SL chip breaker	B chip breaker
 <ul style="list-style-type: none"> • Comprehensive chip breaker covers wide application range • Proper chip control with long tool life 	 <ul style="list-style-type: none"> • Comprehensive roughing design having strong edge strength with long tool life

SB chip breaker	TM chip breaker
 <ul style="list-style-type: none"> • Better chip control at low depth of cut machining 	 <ul style="list-style-type: none"> • Medium-finishing chip breaker, proper surface finish, superior wear resistance

Working procedure	A	B	C
Applicable insert			
Holder	PSDNN5050-U25	PRDCN5050-U32 PRGCN5050-U32	PSSNR5050-S25
Insert	SNMM250724-GH	RCMX3209M0-SL	SNMM250724-VT
Grade	NC3220	NC3220	NC3220




Pipe Industry (Edge milling)

“X” shape machining






- A cutter to make the “X” shape on the both side-end of steel plate, to do bevel-end welding
- Locator wedge type clamping system applied for the cutter provides long durability of cutter as well as strong clamping power


“I” shape machining

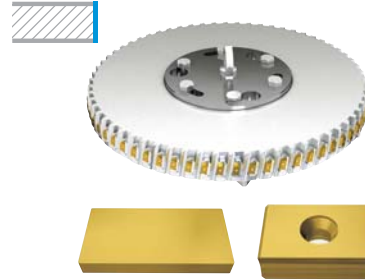

- A machining to make “I” shape on the both side-end of steel plate, to do bevel-end or plane-end welding.
- Variety of inserts (with chip breaker or without chip breaker) are available according to your cutting conditions

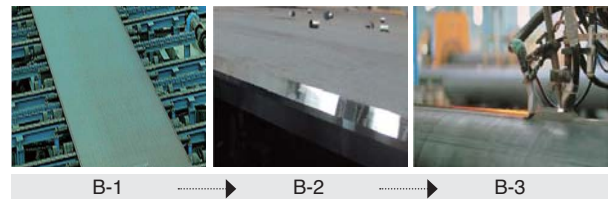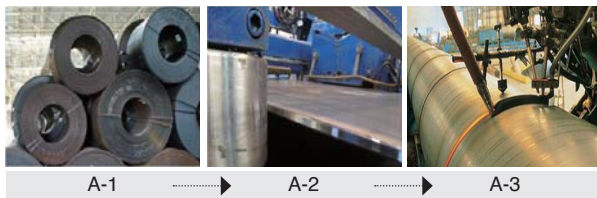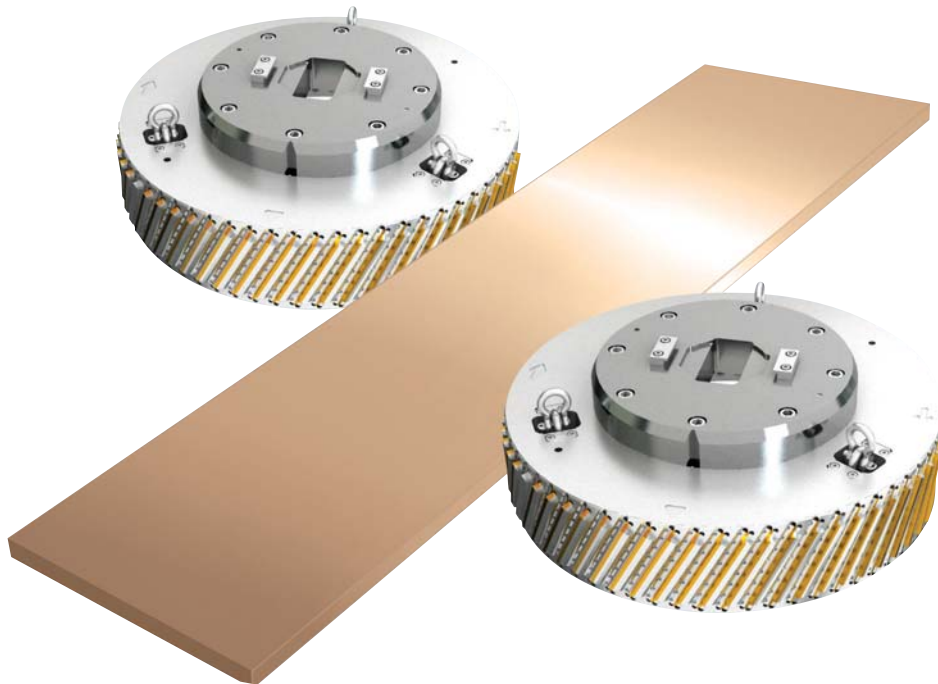


“Y” shape machining




- A machining to make “Y” shape on the both side-end of steel plate, to do bevel-end welding
- Wide chip pocket on cutter provides long durability of it by reducing contact of chip with cutter body

Special machining

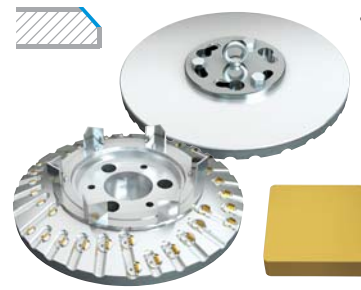


- Special design of cutter as per side-end shape of steel plant upon customer's request is available

Pipe Industry (Bead removal / Parting-off / Chamfering)

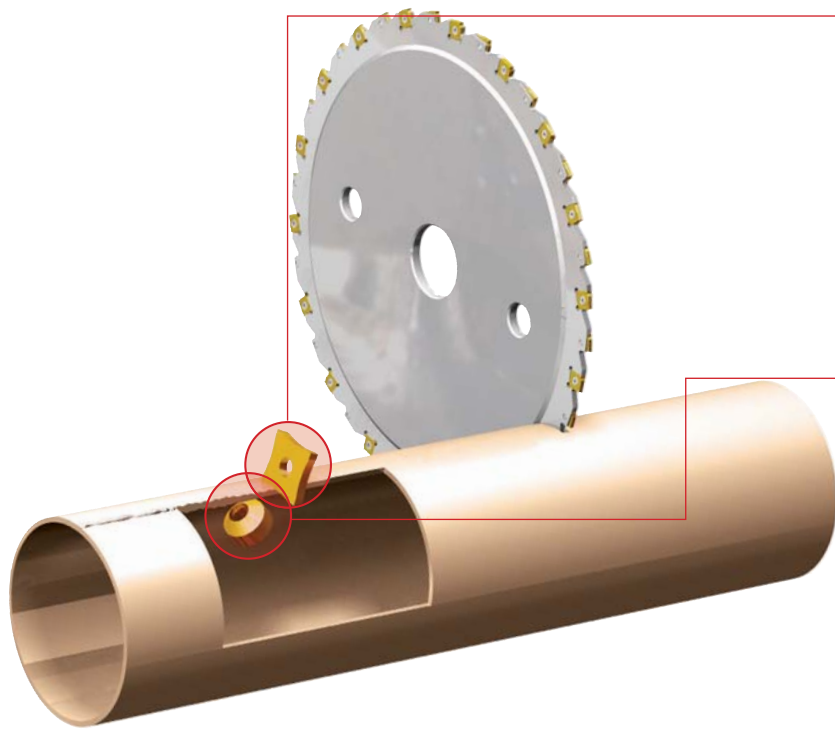

🎯 Bead removal insert : External




- Tool removing protruded part of melted welding material at outside of pipe
- Economical tool by using square insert, utilizing 4 cutting edges
- Grade: NC3030

🎯 Bead removal insert : Internal




- Tool removing protruded part of melted welding material at inside of pipe
- Grade: CX1222

Working Method	Application range	Applicable Inserts	Cutter
	For external bead removal	SDMX80-R □□ / SEGW54-R □□ SNMG150708-R □□ / SNMN1207(SUN452)-□□ R SNMN1507(SNU552)-□□ R / SOET1906-254 SEGX2509-R □□	Customizing
	For internal bead removal	AR□□ (AC) / SF□□ R-□□	

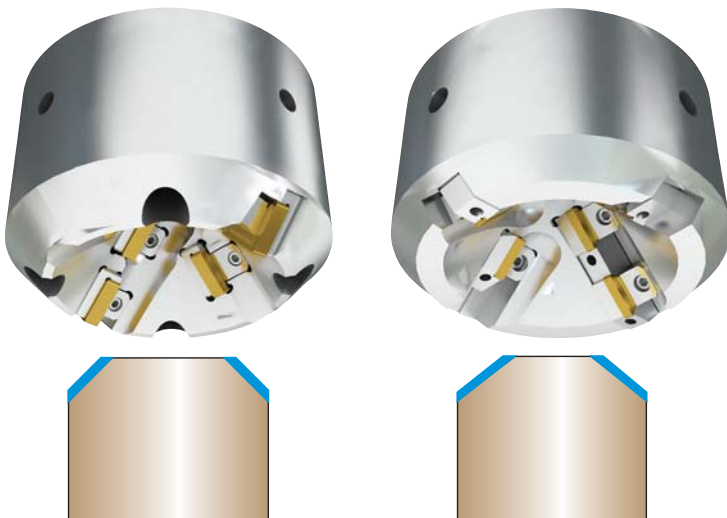

🎯 Chamfer Tool




- Chamfering tool machining cut-off face of pipe
- Special chamfering angle design is possible upon customer's request
- Cost effective concept: Triangle and Square double sided insert provides 6~8 effective cutting edges
- Grade : NCM325, PC3500




Bearing

For external and facingworking

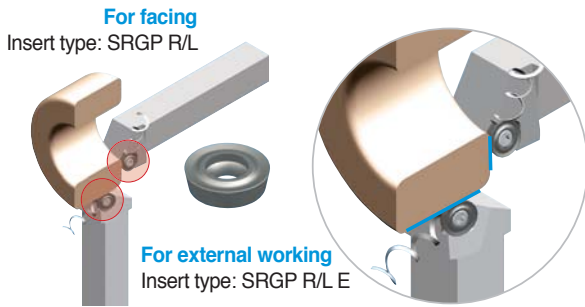


- Applicable on the internal, external and facing working

For Internal and external R-chamfering

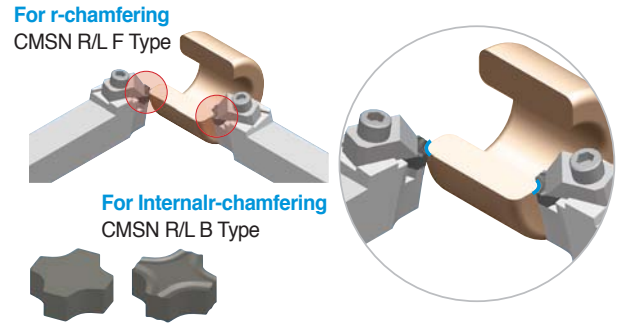


- Applicable 8 corner of insert
- R-shape is realized to internal and external part of corner

For internal working

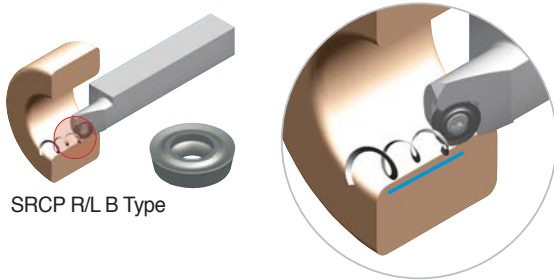


- Applicable over $\varnothing 12$

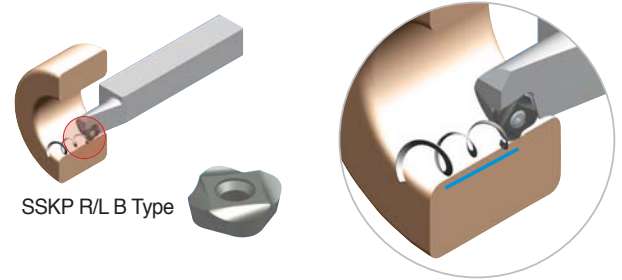

- Applicable over $\varnothing 11.5$ with 4-corner insert for internal and low working


For Ray-way

- For Ray-way on internal and external bearing
- Applicable 3 corner insert
- Able to customize

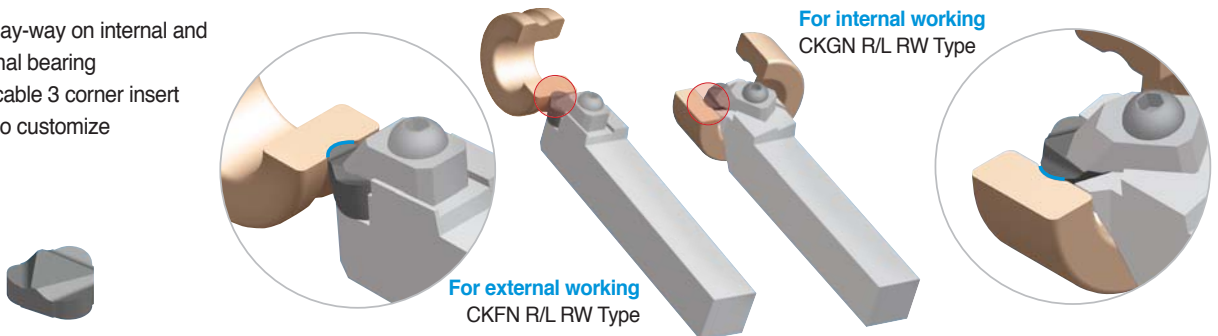

For shield way

- For shield working on internal and external bearing
- Applicable 4 corner insert
- Able to customize

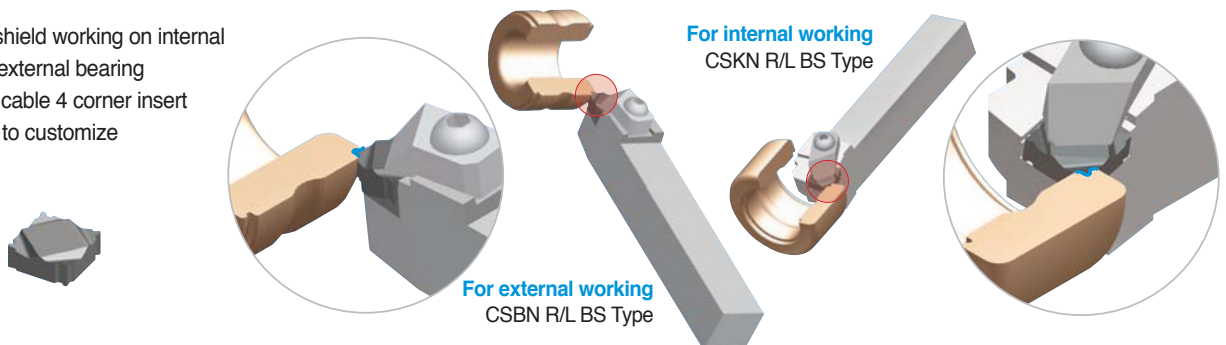

Power Generation (Wind Power Generation Shaft / Tower Flange)

VH chip breaker




- Good chip control in heavy machining
- Excellent performance for flange machining
- Suitable for continuous cutting conditions
- SNMM / CNMM type

VT chip breaker



- Strong cutting edge for high feed and deep cutting depth
- Tough design of chip breaker provides excellent impact resistance
- SNMM / CNMM type

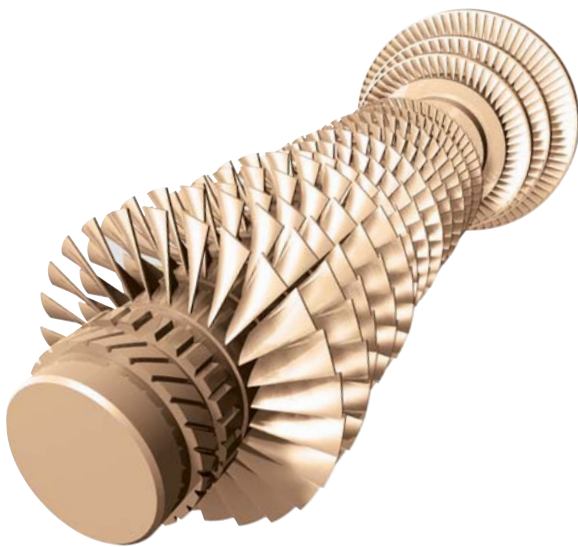

TM (Thread Milling)



- Thread milling indexable tools
- Various type of holder (standard, long, taper) and inserts
- Screw diameter: $\varnothing 9 \sim \varnothing 46\text{mm}$

H-MAX



Solid end-mill for hardened material

- Sub-micron carbide provides strength on sharp cutting edge preventing small chipping on it
- Advanced PVD coating has high hardness with strong antioxidation property, provides excellent tool life at the machining of hard to cut material having high hardness

RCMX type



- High quality machining
- Rigid insert ensures good surface finish and long tool life
- RCMX type

Vulcan Drills (VZD)




- Rigid body for high feed and precision machining
- Better chip evacuation from improved chip breaker
- Applicable for the drilling under poor cutting conditions

KING DRILL



Optimal indexable drill design

- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
- Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
- Grade : PC3500, PC5300

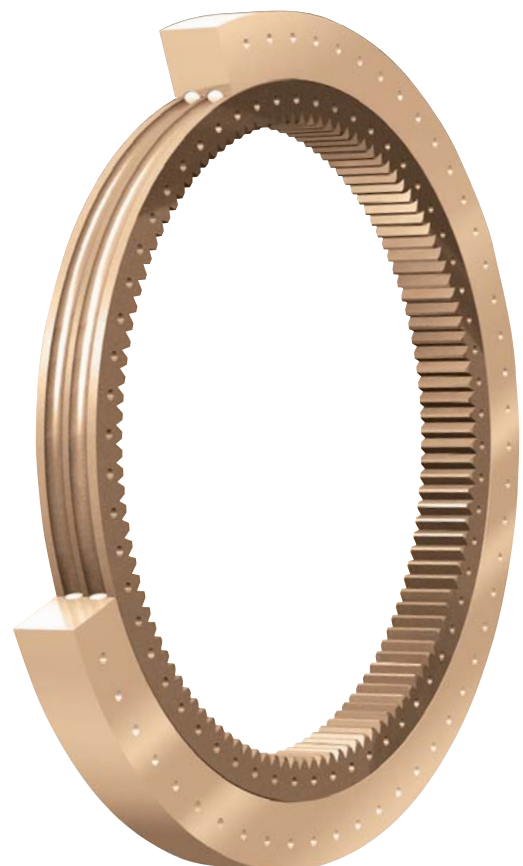

Aviation Industry (Engine / Turbine)


TPD



High precision and high efficiency indexable drill

- Highly efficient drilling in high speed and high feed machining
- Excellent surface roughness

ISO Turning

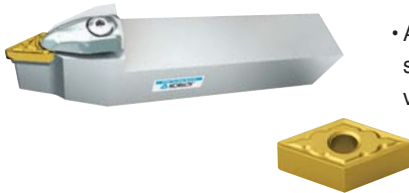

- Available to customize whole and special items for complicated and various shape

Boring Bar



Internal Turning


- ISO standard boring bar for internal machining

I-Max




Solid end-mill for hard to cut material(IFSE3000)

- High rake angle with helical flute provides excellent chip control
- Specially designed cutting edge applied to overcome work-hardening
- Best quality at the machining of hard to cut material

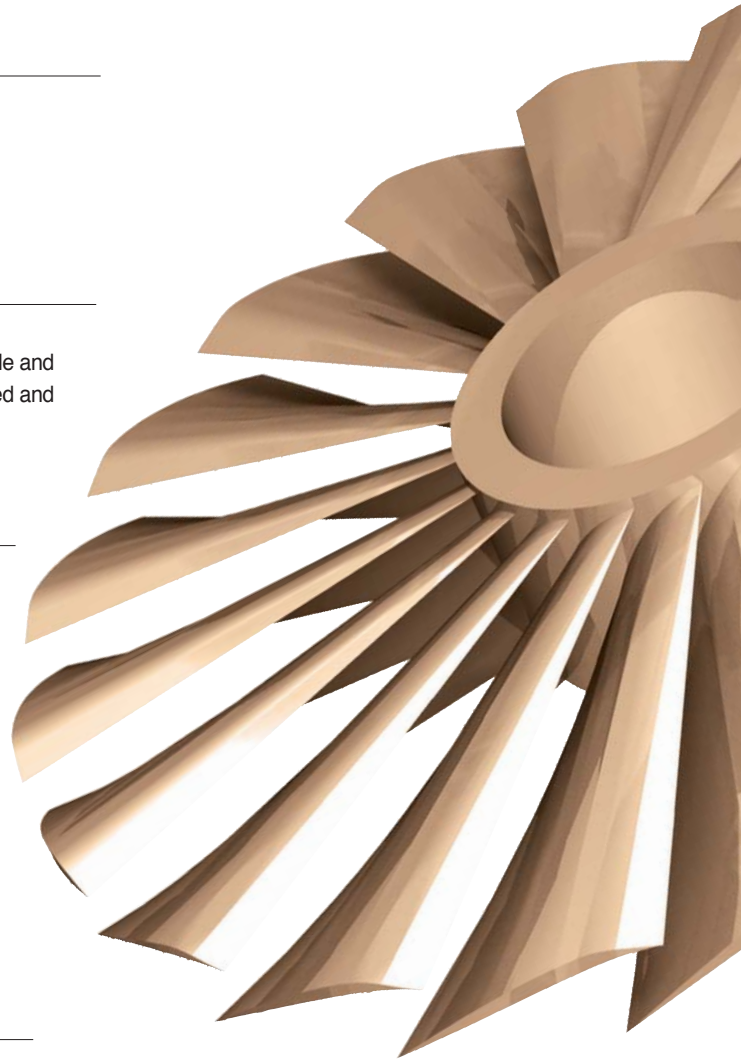

Rich Mill



- Increased number of edges and excellent tool life due to 8 corner edges
- Smooth cutting with low cutting load due to the unique geometry & high rake angle of cutting edge, this combination provides excellent tool life

MSD



Long tool life with protecting material


- Good chip control with proper chip-pocket
- Decrease the chipping and increase the cutting ability due to applicable streamlined shape insert
- Increase impact resistance and lubrication due to apply PVD K Black coating on the sub-micron material

Laser Mill



Multi-functional indexable end-mill

- Extremely hard grade provides long tool life
- Easy and simple clamping of insert by using single screw
- Excellent quality for fine finishing due to its precise tolerance




H-Max



Solid end-mill for hard material

- Sub-micron carbide provides strength on sharp cutting edge preventing small chipping on it
- Advanced PVD coating having high hardness with strong anti-oxidation property coated on it provides excellent tool life as the machining of hard to cut material having high hardness

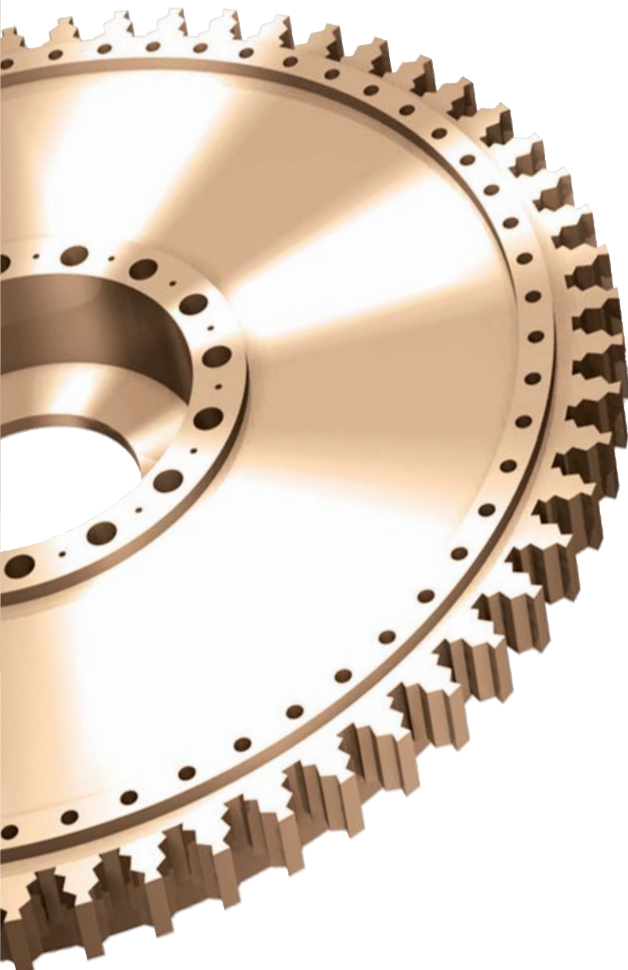

Aviation Industry (Landing Gear / Accessory)

HRMDouble



High efficient and cost effective tool utilizing a double sided insert

- Cost effective tool by using double sided insert with a total of 6 cutting edges
- Smooth cutting utilizing a high rake angle sharp cutting edge insert

MGT



For Grooving, Turning, Profiling, Cut-off

- Multi functional grooving tool can over variety of machining with



Pro-X Mill



High-speed Aluminum Milling tool

- Unique mounting system of insert provides tight clamping of insert
- Mirror surface and high rake angle of insert provides excellent machined surface by reduced cutting load and edge build-up
- Grade: H01




SSEA




Solid carbide end-mill for Aluminum machining

- Advanced geometry of end-mill refrains build-up-edge
- Superior surface machined
- DLC coated end-mills available

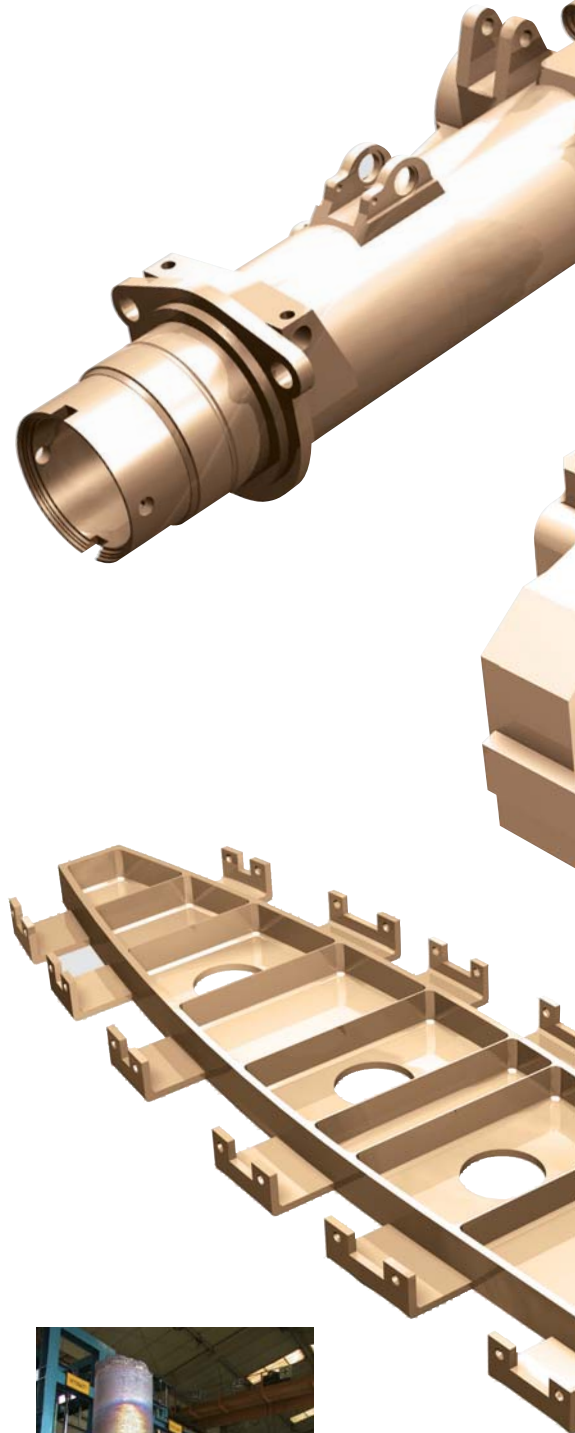

Titanium
Picture provided : KPC Inc.

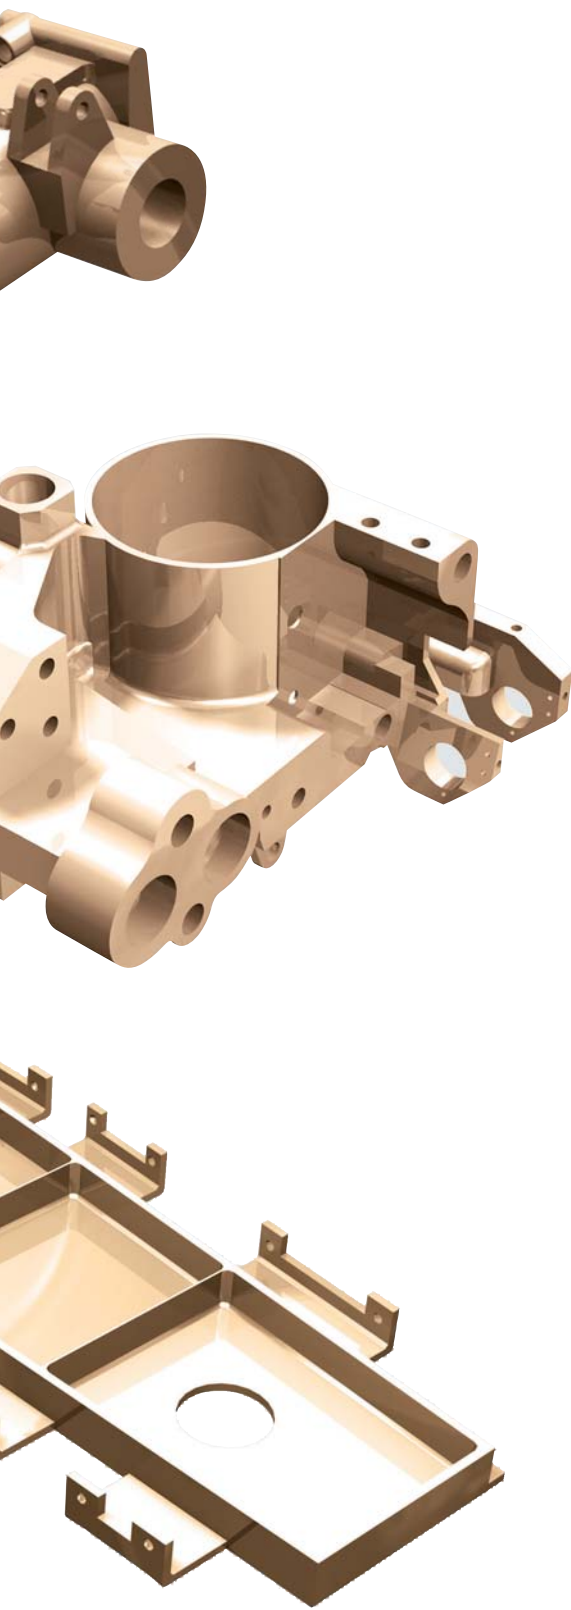

KING DRILL



Optimal indexable drill design


- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
- Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
- Grade : PC3500, PC5300



MLD (Mach Long Drill)

- Direct drilling without separate operation (step drilling) over 20 x D
- Wider flute space along with drill provides effective chip control
- Special design for rigid body provides smooth drilling without bending of drill

Alpha Mill



Multi functional milling tool

- Vast coverage of milling operation due to its variety of cutters and inserts
- 3 dimensional chip breaker design provides smooth cutting

Brazed end-mill



- Apply High Spiral Angle (over 40 degrees) able to get good sharpness
- Available high speed milling due to reduce the working temperature
- Expected long tool life by applying hardened carbide material.
- Economical welded tool due to available 2 or 3 times re-grinding




Slitter Knives

- Application**
- ▶ For video tape
 - ▶ For audio tape
 - ▶ For magnetic tape
 - ▶ For brass plate, mobile battery





- Tool selection**
- ▶ Top slitter knife : Thickness : $\pm 0.01 \sim 0.02 \text{mm}$
 - ▶ Bottom slitter knife : Thickness : $\pm 0.001 \text{mm}$
Flatness : under 0.0005mm
Polishing surface roughness : under 0.05S

Machining example

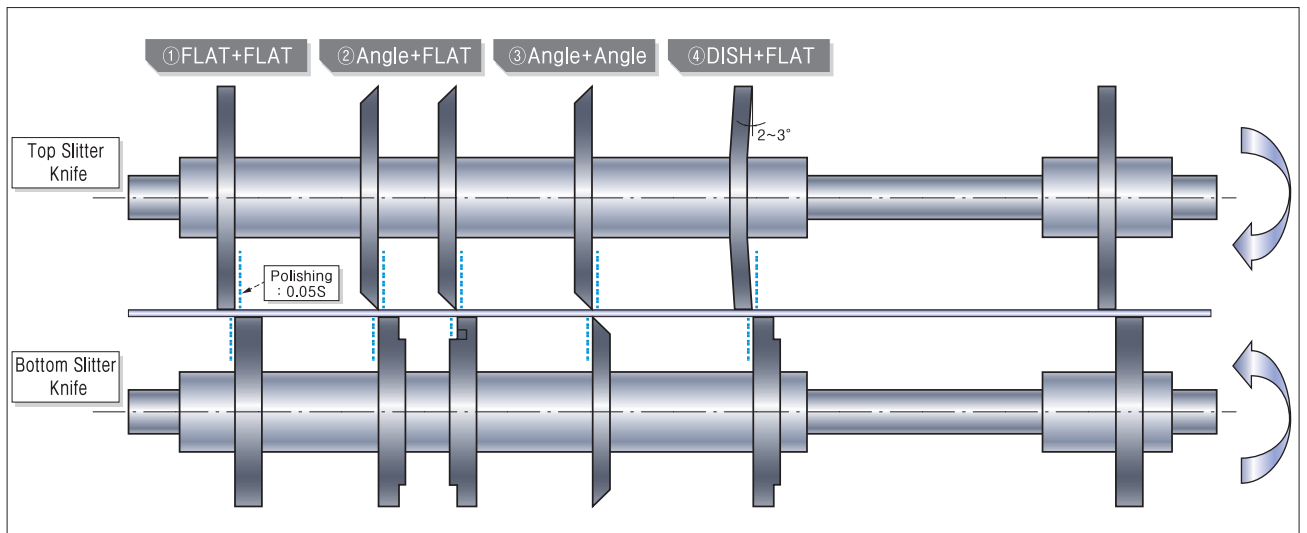


Broach cutter

- Application** ▶ Broach cutters apply to inner machining of metal bearing which is used for automobile crank shaft

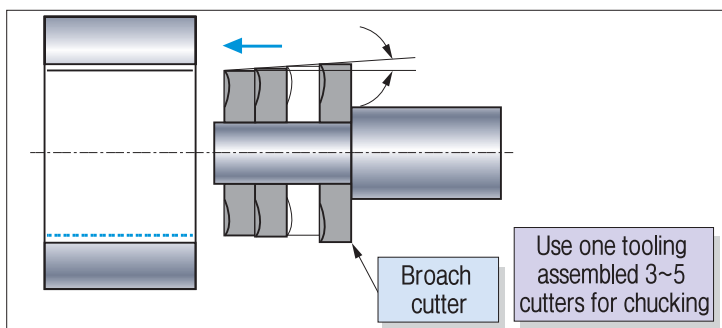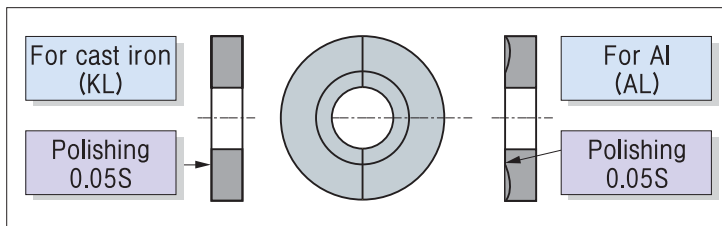


Order

- Designation for cast iron : $KL \ \varnothing d \times \varnothing D \times T$
 - Designation for AL : $AL \ \varnothing d \times \varnothing D \times T$
: $AL \ \varnothing d \times \varnothing D \times T \times \alpha^\circ$
- (If there is no mentioned any angle, $\alpha = 30^\circ$)

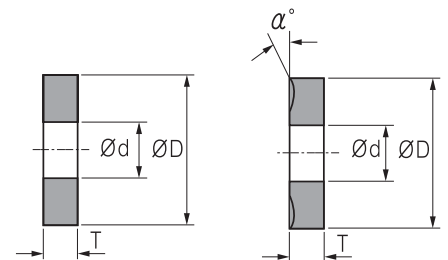


Pulley insert for tailor made





Designation : DF356-3B

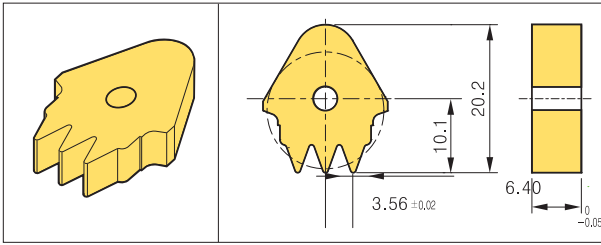


Designation : DF356-4B

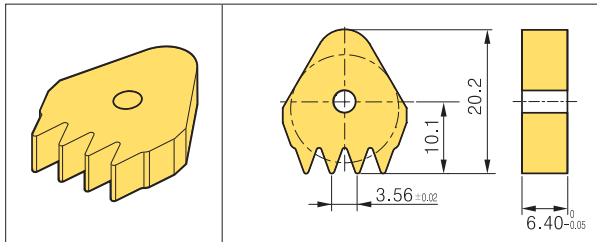


Designation : DF356-5A

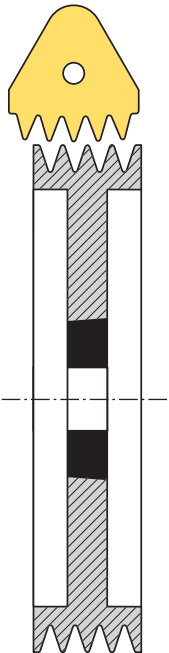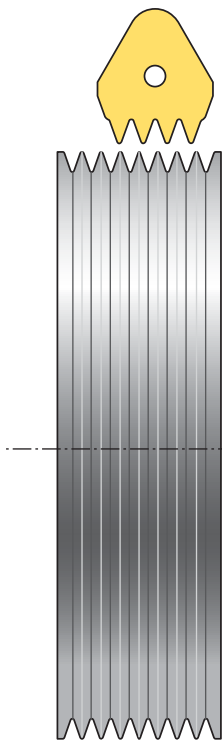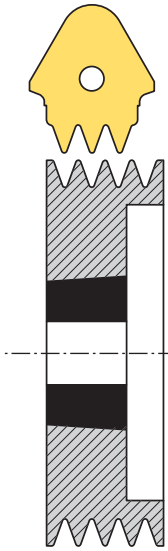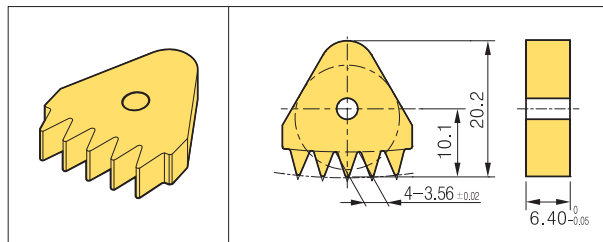

Designation : VF13M522

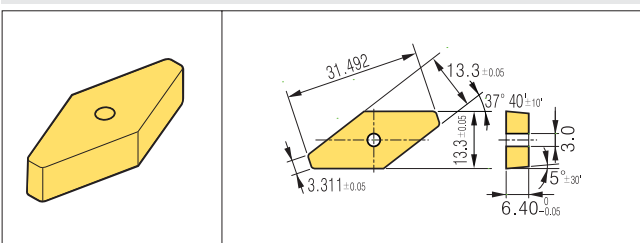

Designation : UF320

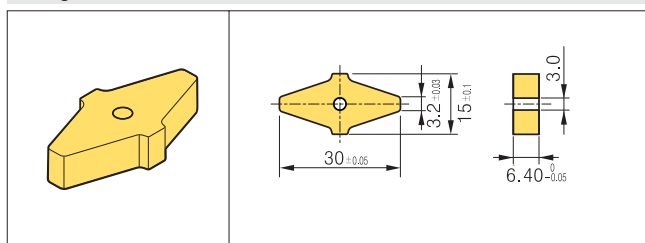

Automobile tooling example (Knuckle)

Micro Boring bar



Mach Drill



Micro Boring bar



Indexable Side Cutter(SPB)




Future Mill(FMP)



Indexable Side Cutter(Tangential type)




Indexable Side Cutter(Radial type)

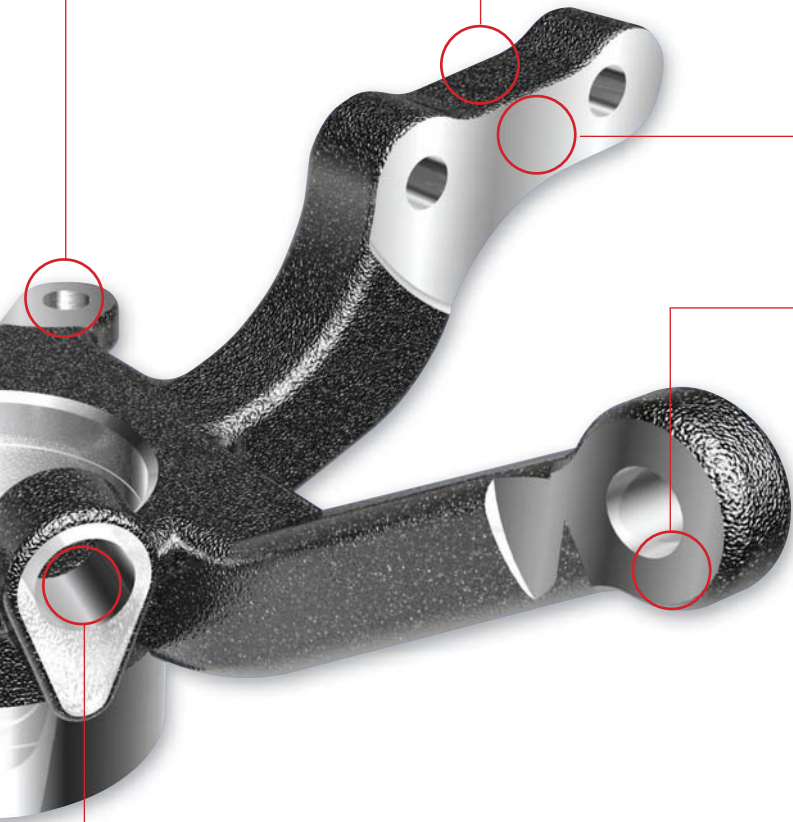

Future Mill(FMP)





Step Drill

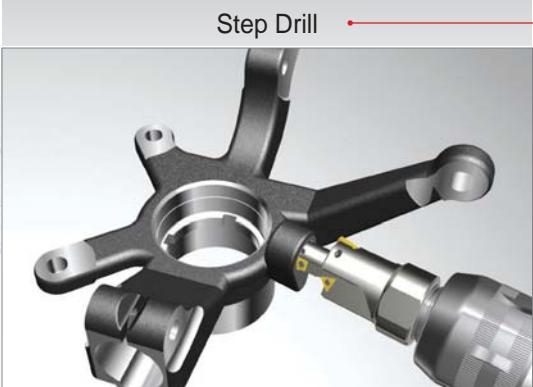




Drill (SPD)





Automobile break tooling example (Carrier)

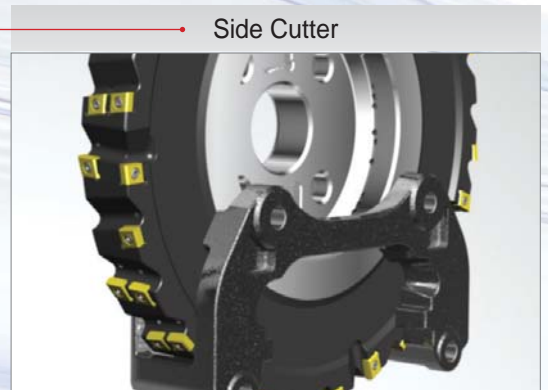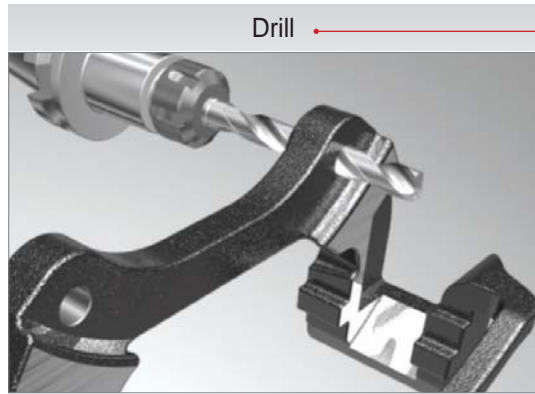

Automobile break tooling example (Carrier)

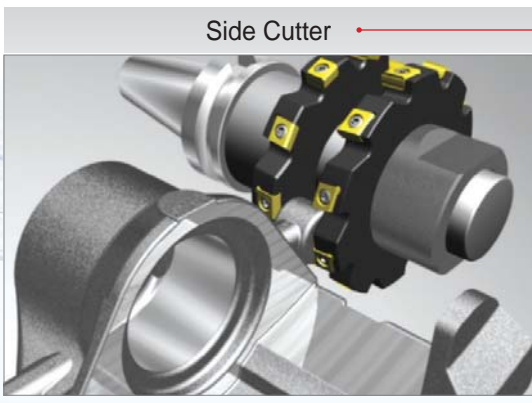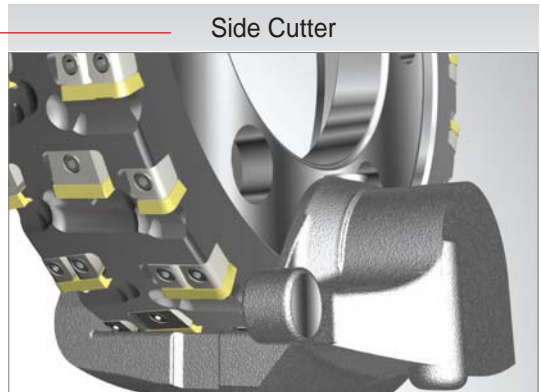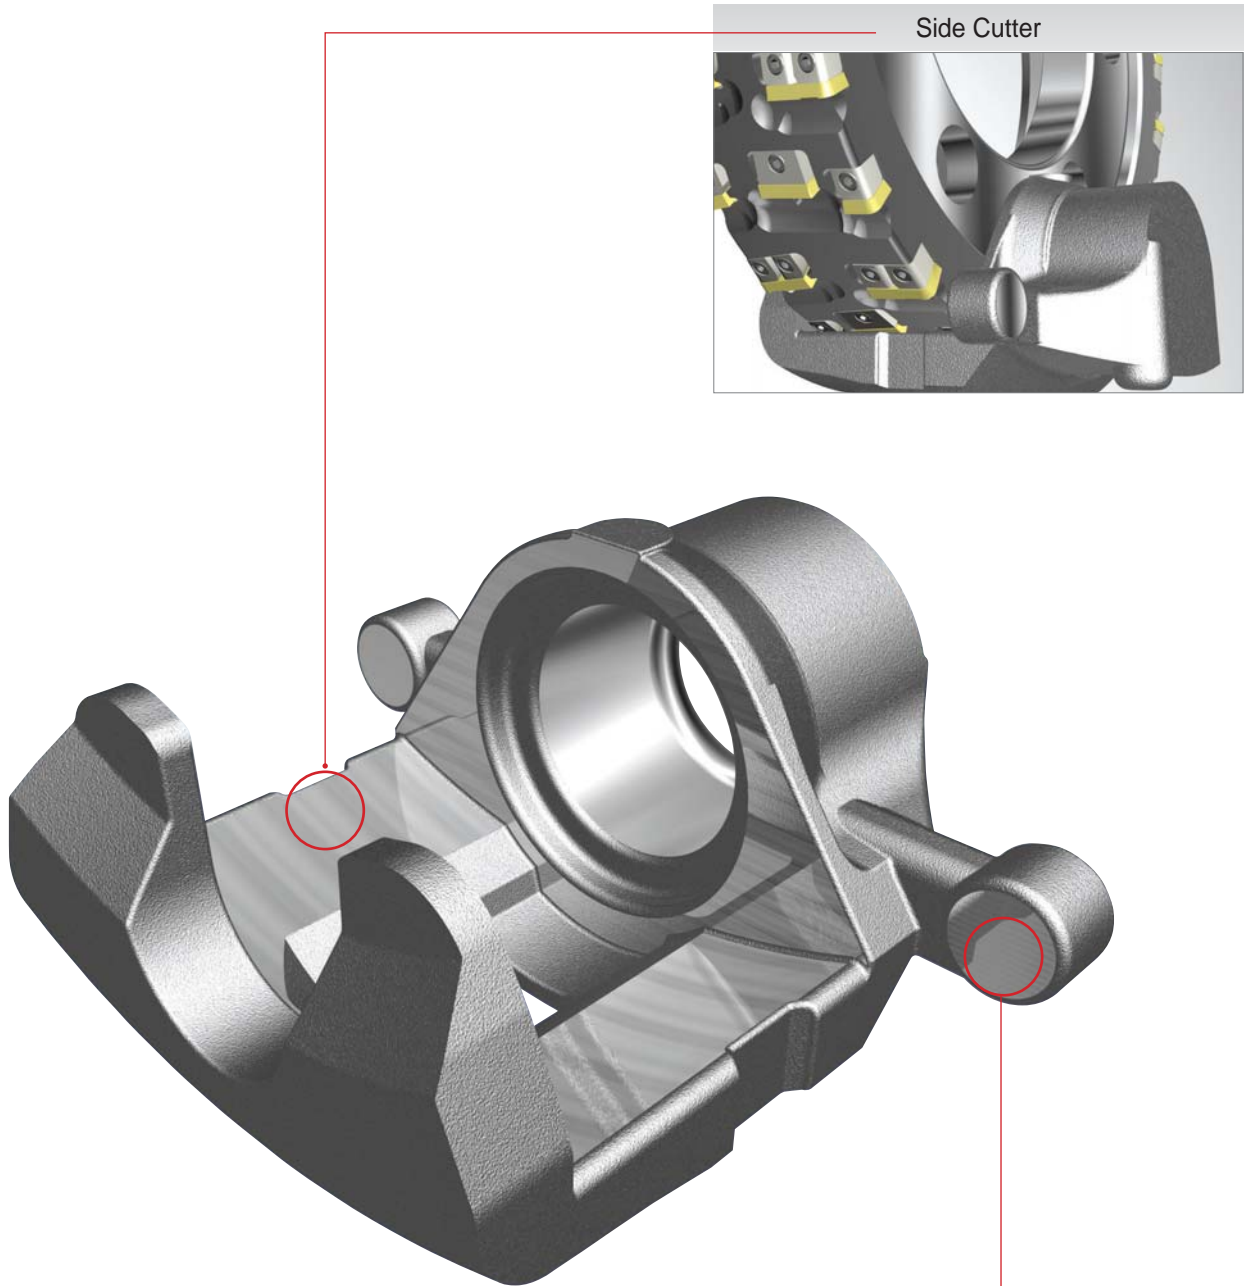

Automobile tooling example (Connecting Rod)

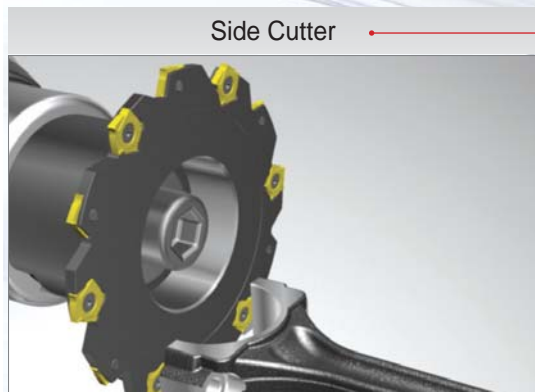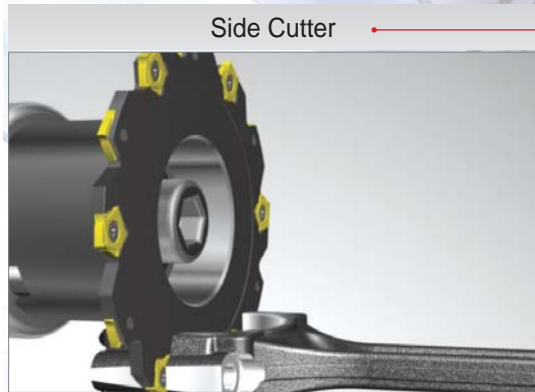

Rich Mill(RM8)



Drill(SPD)




Step Drill







Drill





Automobile engine tooling example (Block)


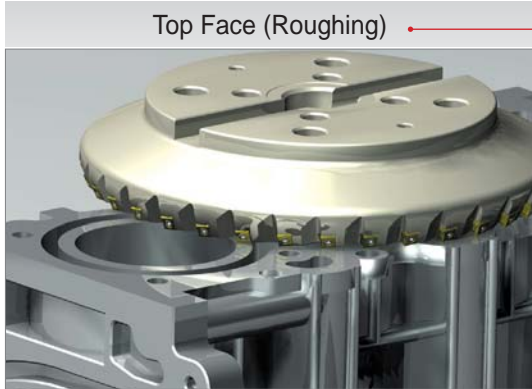


• 8코너 사용 인서트 적용

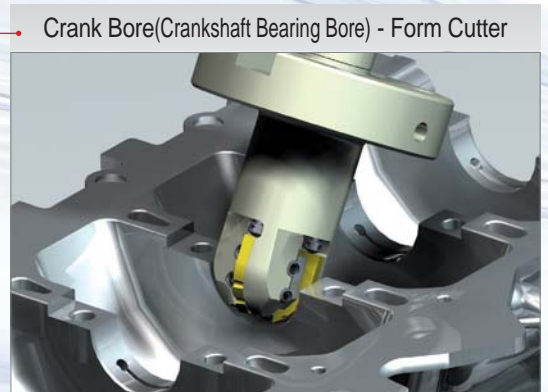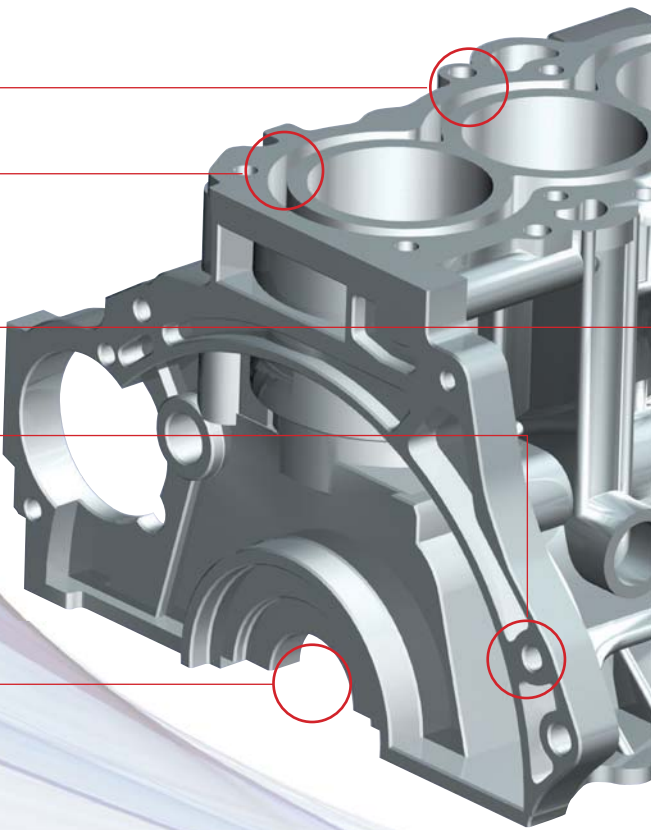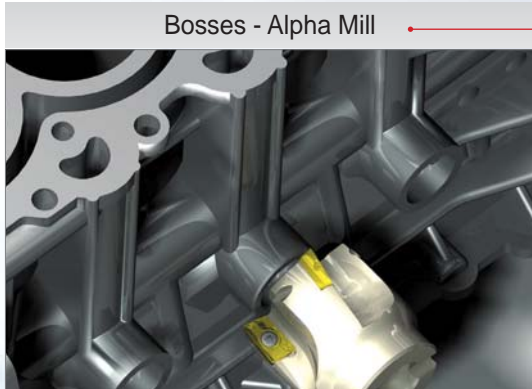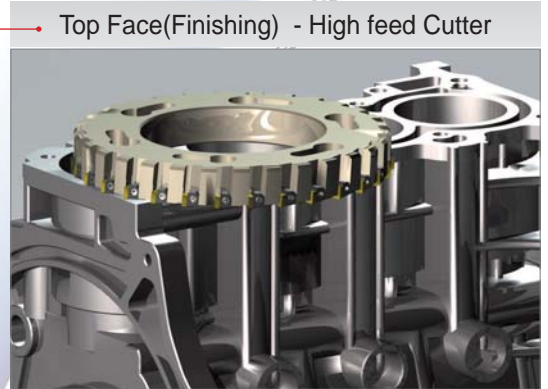

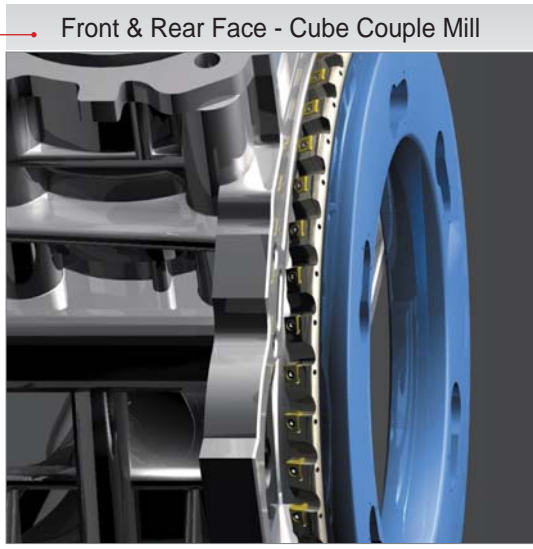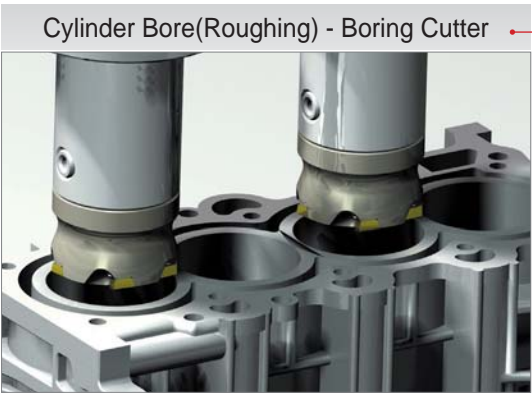


- High feed cutter made of aluminum
- Due to light weight, it s easy to handle & effective to prevent accident

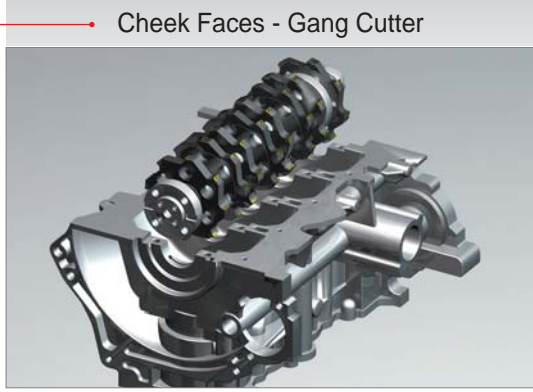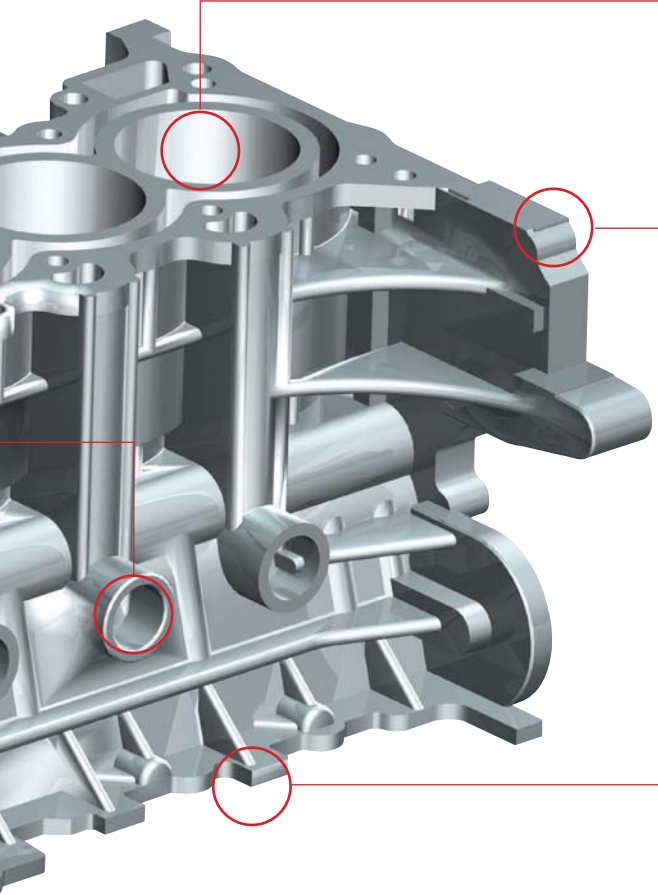

Automobile engine tooling example (Head)

Top Face(Roughing & Finishing) - High Feed Cutter

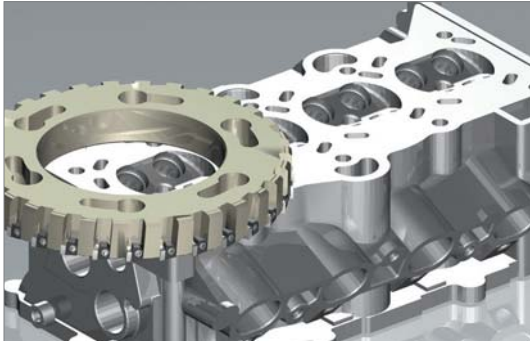

• Carbide insert, PCD insert

Top Face(Roughing & Finishing) - Aero Mill



• Due to the light weight of aluminum body that about 50% of steel body, excellent cutting performance with high speed machining can be achieved.


Step Burnishing Reamer




Straight Reamer



Bottom Face(Roughing & Finishing) - High feed Cutter

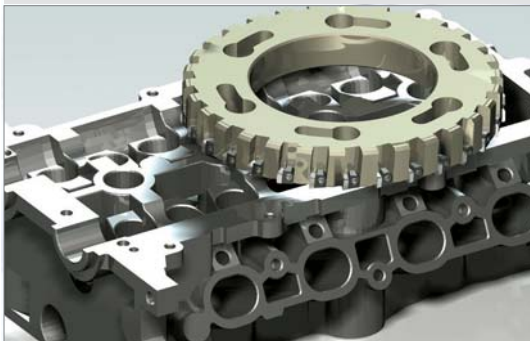



• Carbide insert, PCD insert

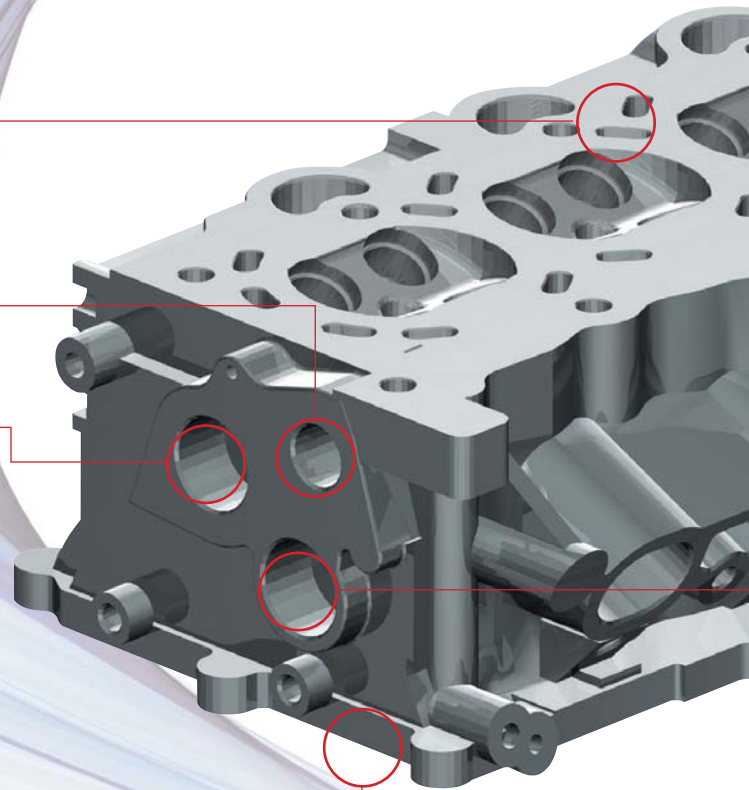


Counter Bore Tool



Valve Seat - Apolo Cutter(Special Boring Holder)

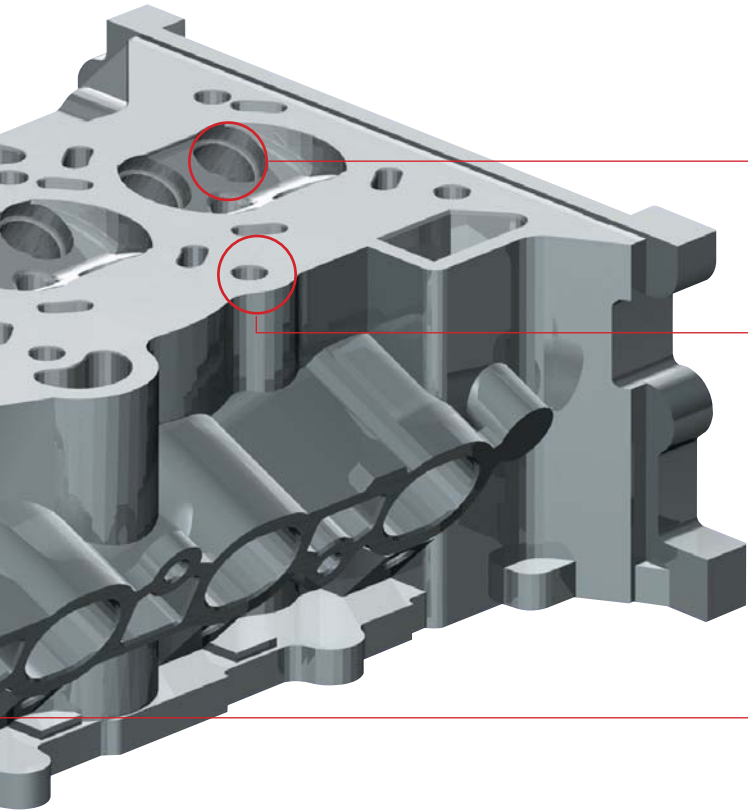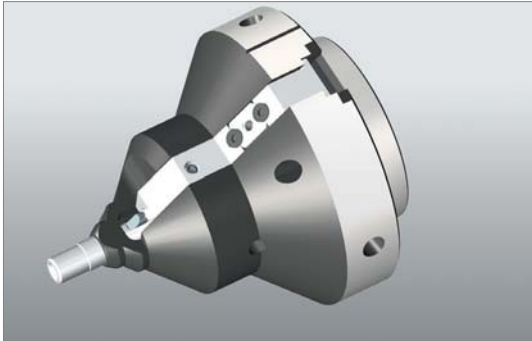

Top Face(Drilling) - Mach Drill

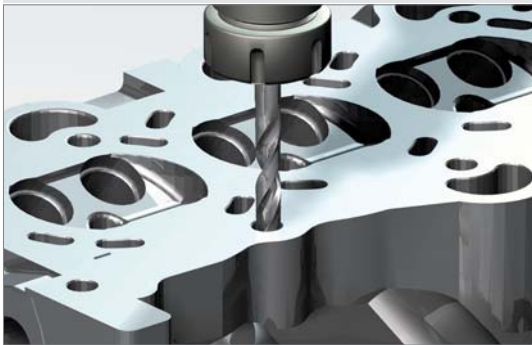

Cam Shaft Bearing Seat - Line Boring Bar



Cam Journal Bore - High Speed Reamer




- Stable machining at high speed without chattering

- Available for high speed machining
- Excellent surface finish & roundness




Automobile engine tooling example (Crank Shaft)

Oil Bore - Mach Long Drill(MLD)

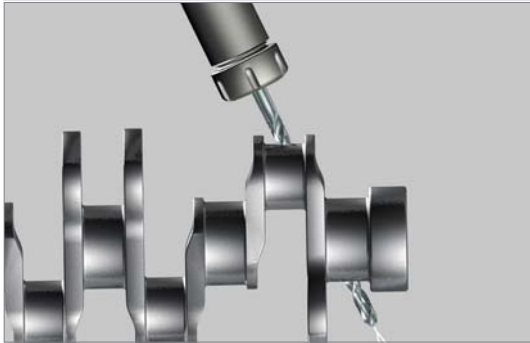


Taper Spline Structure
(Rigidity has been enhanced due to increased contact area)

Oil Bore - Mach Long Drill(MLD)

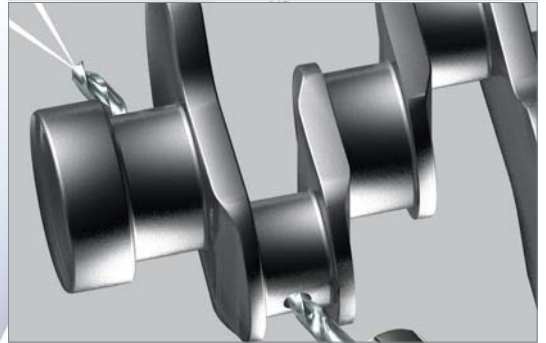

- Machining without step feed operation for deep hole drilling like 20D
- Optimal performance with MQL System

Pin & Journal - Crankshaft Cutter(Internal / External)

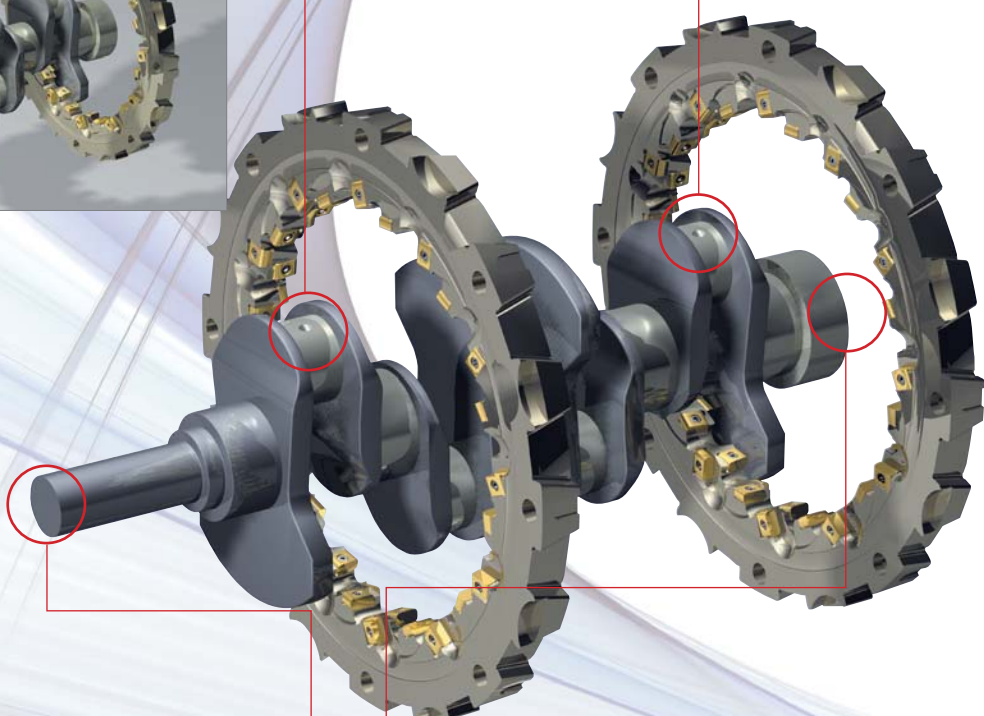

Post End - Alpha Mill



Flange End - Alpha Mill

